

DESCRIPTION

The PMP15 series of AC/DC wall mount switching power supplies are for 15 watts of continuous output power. They are enclosed in a 94V-1 rated polyphenylene-oxide case with four types of interchangeable AC plugs: European plug, UK plug and North American plugs. All models meet EN55011 and FCC class B emission limits, and are designed for medical application, not for life-supporting equipment.

FEATURES

- Interchangeable AC plugs
- High efficiency
- Low ripple & noise
- Overvoltage protection
- Short-circuit protection
- 100% burn-in at full rated load
- Standby consumption less than 0.3 W
- Compliant with CEC and ENERGY STAR efficiency level V requirements
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	0.5 A (rms) for 115 VAC 0.3 A (rms) for 230 VAC
Enclosure leakage current:	100 μ A max. @ 264 VAC, 63 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	1% peak to peak maximum(except 100 mVp-p max. for lower than output 10 V)
Overvoltage protection:	Set at 116% to 230% of its nominal output voltage
Overcurrent protection:	Protected to short circuit conditions
Temperature coefficient:	$\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +40 $^{\circ}$ C
Storage temperature:	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity:	10% to 90% non-condensing
Derating:	Derate from 100% at +40 $^{\circ}$ C linearly to 50% at +60 $^{\circ}$ C

PMP15 SERIES



SAFETY STANDARD APPROVALS



UL ES 60601-1, CSA C22.2 No. 60601-1
File No. E 211696



TÜV EN 60601-1

GENERAL SPECIFICATIONS

Hold-up time:	8 ms minimum at 115 VAC
Turn on delay time:	3 s maximum at 115 VAC
Efficiency:	Compliant with Energy Star efficiency level V requirements (see rating chart)
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	30 A @ 115 VAC or 60 A @ 230 VAC (80 A for PMP15M/D/E-10) at 25 $^{\circ}$ C cold start
Withstand voltage:	4000 VAC from input to output (2 MOPP)
MTBF:	300,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK-217F
EMC Performance (IEC60601-1-2)	
EN55011:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class A and D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ± 8 KV air and ± 6 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 2 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 3 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, 60% reduction for 100 ms, and >95% reduction for 10 ms

UNIVERSAL INPUT

PMP15 MEDICAL SERIES

OUTPUT VOLTAGE/CURRENT RATING CHART


Model ⁽¹⁾	Output						Average Active Efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽²⁾	Max. Output Power	
PMP15M-10	5 V	0 A	3.0 A	±5%	100 mV	15 W	78 /77%
PMP15M-10-1	6 V	0 A	2.5 A	±5%	100 mV	15 W	80 /78%
PMP15M-11	9 V	0 A	1.67 A	±5%	100 mV	15 W	82 /80%
PMP15M-12	12 V	0 A	1.25 A	±5%	120 mV	15 W	82 /80%
PMP15M-13	15 V	0 A	1.0 A	±5%	150 mV	15 W	83 /80%
PMP15M-14	24 V	0 A	0.625 A	±5%	240 mV	15 W	85 /81%
PMP15D-10	5 V	0 A	3.0 A	±5%	100 mV	15 W	78 /77%
PMP15D-11	9 V	0 A	1.67 A	±5%	100 mV	15 W	82 /80%
PMP15D-12	12 V	0 A	1.25 A	±5%	120 mV	15 W	82 /80%
PMP15D-14	24 V	0 A	0.625 A	±5%	240 mV	15 W	85 /81%
PMP15NP-10	5 V	0 A	3.0 A	±5%	100 mV	15 W	78 /77%
PMP15NP-11	9 V	0 A	1.67 A	±5%	100 mV	15 W	82 /80%
PMP15NP-12	12 V	0 A	1.25 A	±5%	120 mV	15 W	82 /80%
PMP15NP-14	24 V	0 A	0.625 A	±5%	240 mV	15 W	85 /81%
PMP15E-10	5 V	0 A	3.0 A	±5%	100 mV	15 W	78 /77%
PMP15E-12	12 V	0 A	1.25 A	±5%	120 mV	15 W	82 /80%
PMP15E-14	24 V	0 A	0.625 A	±5%	240 mV	15 W	85 /81%

NOTES:

- PMP15M models are for interchangeable AC plugs which are to be ordered separately. PMP15D and PMP15NP models are with fixed North American AC plug for safety approval cULus only, and PMP15E models with fixed European AC plug for safety approval TÜV only.
- Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

- PMP15M models (Interchangeable AC Plug)

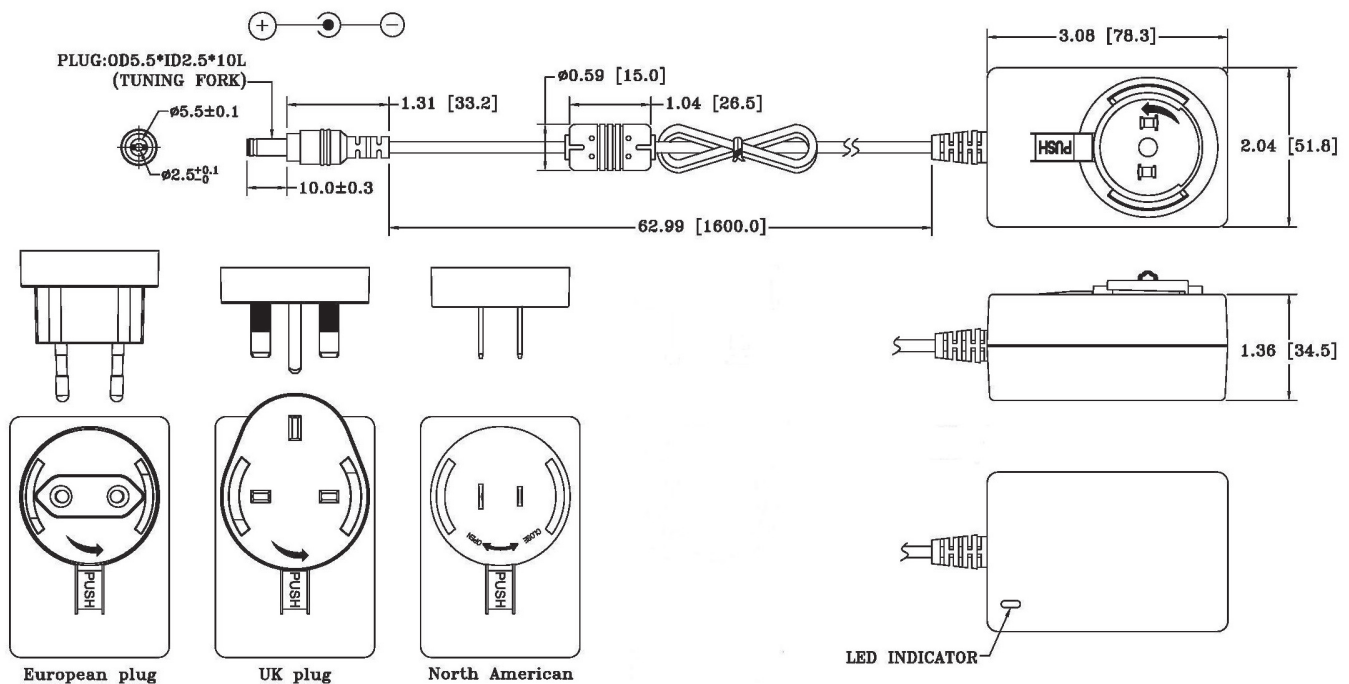


Specifications are subject to change without notice. It is responsibility of each customer to thoroughly test each product and part number under their unique parameters and environments to ensure a product will work properly and reliably.


Click below for more details, to buy on-line or request volume pricing:
<http://power.sager.com/protek-PMP15-power-supply.html>

(866) 588-1750
power@sager.com
<http://power.sager.com>


2. PMP15D models (Fixed North American AC Plug, Polarization)

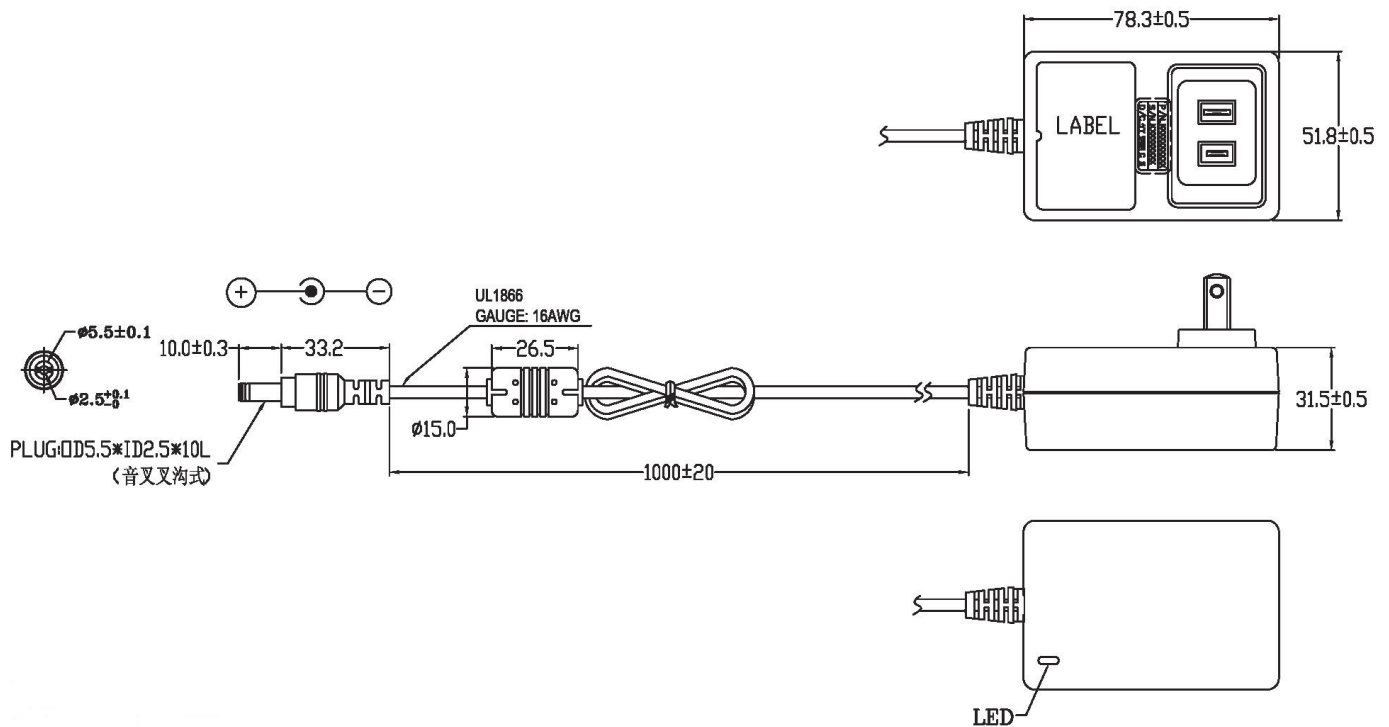

3. PMP15NP models (Fixed North American AC Plug, Non-Polarization)

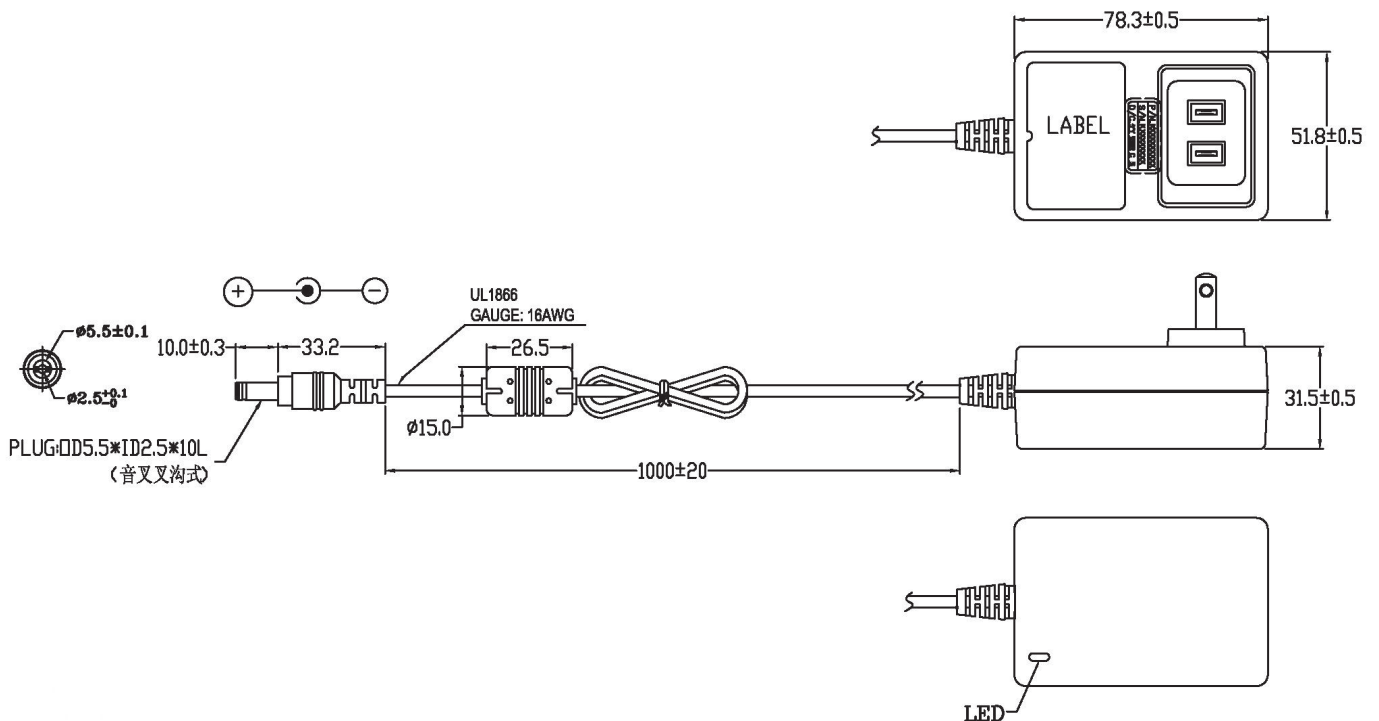

4. PMP15E models (Non-replaceable AC Plug)

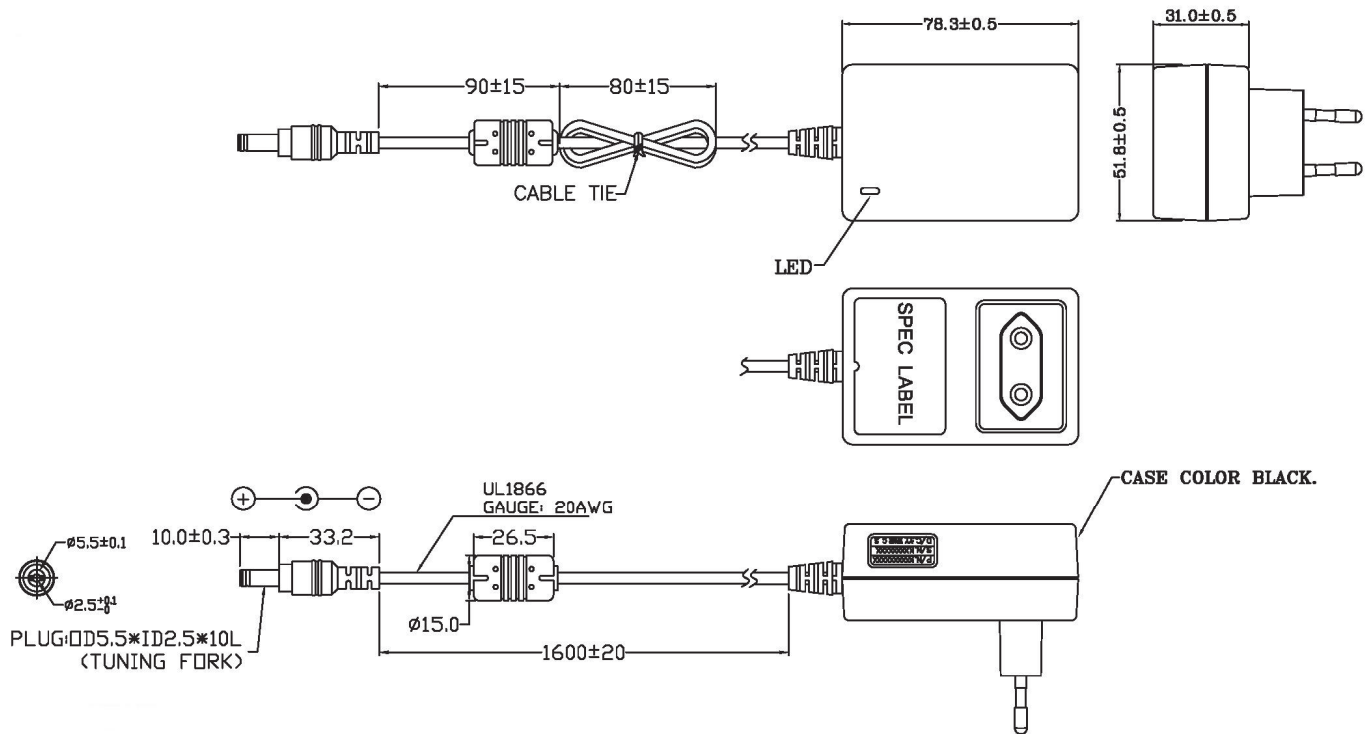

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Weight: 200 grams (0.44 lbs.) approx.
4. Output cable is 1600 mm 20 AWG except 1000 mm 16 AWG for 5 V and 6 V output models, and 1200 mm 18 AWG for 9 V output model, so as to comply with CEC and Energy Star efficiency level V requirements.
5. Output connector is 5.5 mm O.D., 2.5 mm I.D., 10 mm long barrel female connector, center positive voltage.
6. AC inlet plug

Type	European plug	UK plug	North American
Order no.	4AP00043	4AP00049	4AP00045