


DMS Accessories

Connectors and Sockets

DESCRIPTION

Murata Power Solutions' 4320-01069-0 six position connector housings and 4400-01032-0 crimp terminals provide a secure method for making input/output connections to all panel mounted 12-pin DMS series meters. These connectors are ideal for use in low-volume prototype applications. Two connector housings and 12 terminals are required for each meter.

6-Position Connector Housing

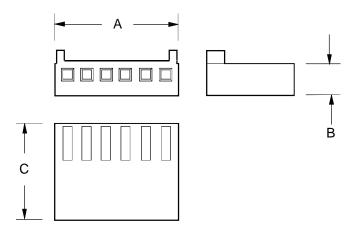

Connector Housing	A	В	C
4320-01069-0	0.62	0.19	0.50
	(15.7)	(4.8)	(12.7)


Dimensions: in. (mm) All dimensions are nominal

Crimp Terminal	A	В	C	D
4400-01032-0	0.042	0.08	0.08	0.06
	(1.07)	(2.0)	(2.0)	(1.5)
	E	F	G	Н
	E 0.38	F 0.05	G 0.08	H 0.075


Dimensions: in. (mm) All dimensions are nominal

Electrical Specifications		
Insulator Material:	Nylon	
Flammability Rating:	UL94V-0	
Wire Size:	22-26 AWG	
Stripping Length:	0.100" to 0.125" (2.54 to 3.17mm)	
Current Rating:	2.5A continuous	
Insulation Diameter:	0.062" (1.57mm) max.	

Crimp Terminals

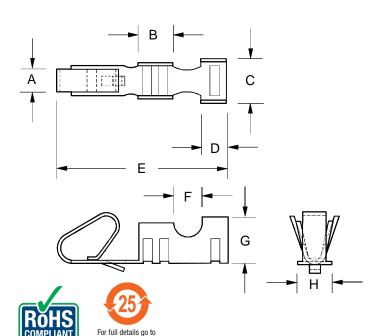

Crimp Terminal and Housing Installation

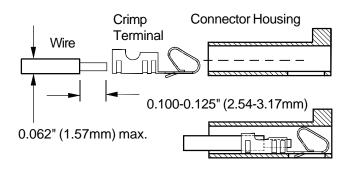

/w.murata-ps.com/rohs

DMS Accessories


Connectors and Sockets


DESCRIPTION


Ε

6-Position SIP Sockets



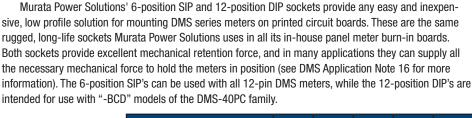




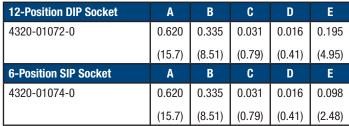

Dimensions: in. (mm) All dimensions are nominal

Meter and Socket Installation

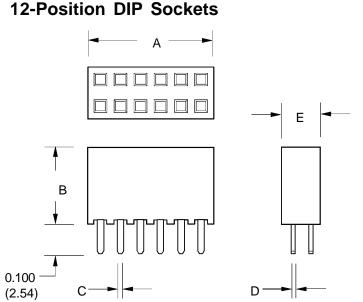

Meter	Socket	PC Board
0.33-0.40 typ.		

Electrical Specifications		
Insulator Material:	Black liquid crystal polymer	
Flammability Rating:	UL94V-0	
Operating Temperature:	−65 to +105°C	
Contact & Tail Plating:	Matte Tin	
PC-board Hole Diameter:	0.037 (0.94) to 0.043 (1.09)	
Contact Material:	Phosphor Bronze	
Current Rating:	3A continuous	
Withdrawal Force:	5 oz. (1.39N) avg./position with 0.025 (0.64) pin	

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED



This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy:

Refer to: http://www.murata-ps.com/requirements/

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.