

Modem Transformer

ACTT-1055



RoHS
Compliant



15.0 x 15.0 x 12.5 mm

FEATURES:

- High frequency power transformer
- High frequency switching transformer


APPLICATIONS:

- Audio transformer
- Current sensors
- Test equipment


STANDARD SPECIFICATIONS at 25°C

Parameters	Minimum	Typical	Maximum	Units	Notes	
Turn Ratio (1-3):(6-4)	1:1 - 5%	1:1	1:1 + 5%			
Impedance (1kHz/1V)	(1-3)	510	600	690	Ω	With 600 Ω load between (6-4)
	(6-4)	510	600	690	Ω	With 600 Ω load between (1-3)
DCR	(1-3)	50.15	59.0	67.85	Ω	
	(6-4)	50.15	59.0	67.85	Ω	
High Pot	(1-3) to (6-4)	----	1875	----	Vrms	0.5mA Max, 1Sec

OUTLINE DIMENSIONS

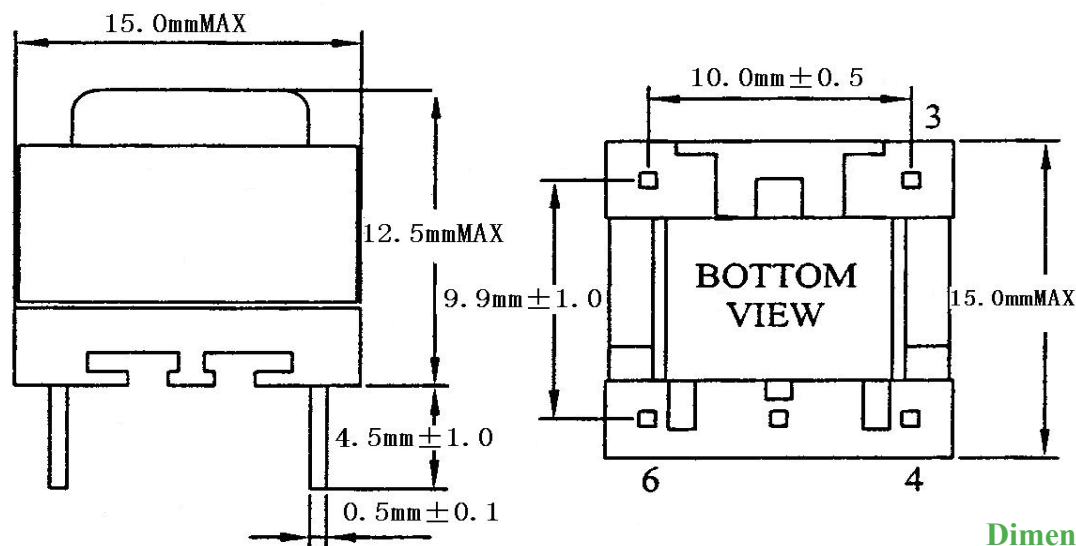

SCHEMATIC

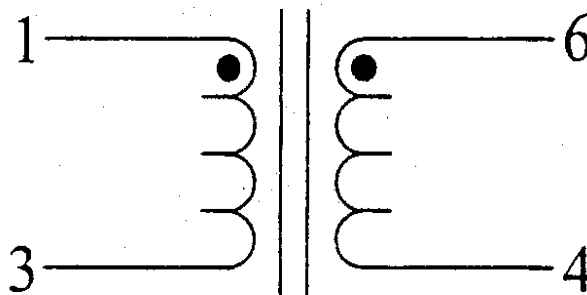

Modem Transformer

ACTT-1055




RoHS
Compliant




15.0 x 15.0 x 12.5 mm

PACKING


Packing material: Foam Box (223 x 194 x 30mm), 143pcs/foam box

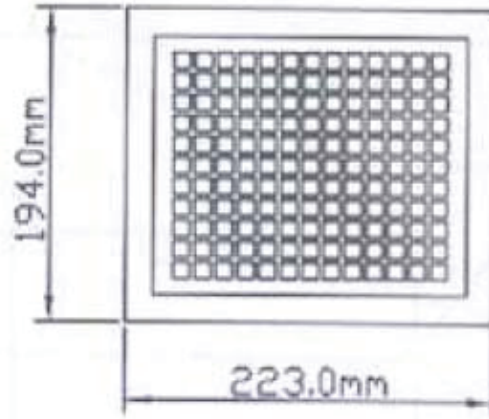

Inside Box: 1001 pcs / 7 foam boxes

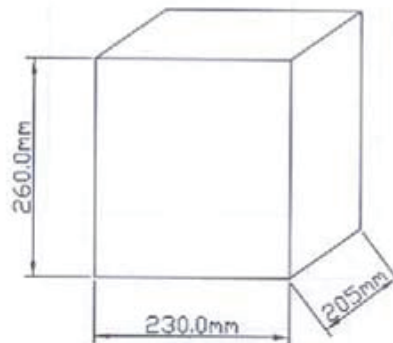

Outside Box: 2002pcs/ 2 Inside Boxes

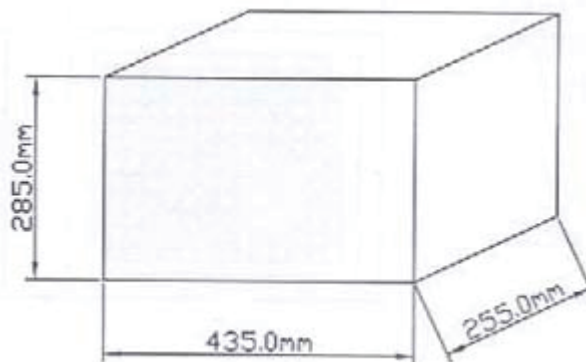

Dimension: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001: 2008
CERTIFIED



**ABRACON
CORPORATION**

Visit www.abracon.com for Terms & Conditions of Sale

Revised: 06.27.11

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com