

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0387006324](#)  
**Status:** **Active**  
**Overview:** Beau Barrier Strips  
**Description:** 8.26mm Pitch Beau PCB Terminal Strip, without Mounting Ends, 24 Circuits

**Documents:**

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Drawing \(PDF\)](#)

**General**

|                |                                     |
|----------------|-------------------------------------|
| Product Family | Terminal Blocks                     |
| Series         | <a href="#">38700</a>               |
| Application    | N/A                                 |
| Component Type | One Piece                           |
| Overview       | <a href="#">Beau Barrier Strips</a> |
| Product Name   | Fixed Mount Barrier                 |
| Type           | Barrier Strip                       |
| UPC            | 800756314396                        |

**Physical**

|                                |                    |
|--------------------------------|--------------------|
| Circuits (Loaded)              | 24                 |
| Circuits (maximum)             | 24                 |
| Color - Resin                  | Black              |
| Entry Angle                    | Horizontal         |
| Lock to Mating Part            | None               |
| Material - Metal               | Brass              |
| Material - Plating Mating      | Tin                |
| Material - Plating Termination | Tin                |
| Material - Resin               | Polyester          |
| Number of Rows                 | 1                  |
| Orientation                    | Horizontal         |
| PC Tail Length                 | 3.56mm             |
| PCB Retention                  | None               |
| Panel Mount                    | No                 |
| Pitch - Mating Interface       | 8.26mm             |
| Pitch - Termination Interface  | 8.26mm             |
| Plating min - Mating           | 3.810µm            |
| Plating min - Termination      | 3.810µm            |
| Polarized to Mating Part       | No                 |
| Shrouded                       | Dual-Barrier       |
| Stackable                      | Yes                |
| Surface Mount Compatible (SMC) | No                 |
| Temperature Range - Operating  | -40°C to +130°C    |
| Termination Interface: Style   | Through Hole       |
| Wire Size AWG                  | 14, 16, 18, 20, 22 |
| Wire Size mm <sup>2</sup>      | 0.50-1.50          |

**Electrical**


|                               |       |
|-------------------------------|-------|
| Current - Maximum per Contact | 15.0A |
| Voltage - Maximum             | 300V  |

**Material Info**

|                    |         |
|--------------------|---------|
| Engineering Number | 70524-C |
|--------------------|---------|

**Reference - Drawing Numbers**

|               |              |
|---------------|--------------|
| Sales Drawing | SD-38700-001 |
|---------------|--------------|

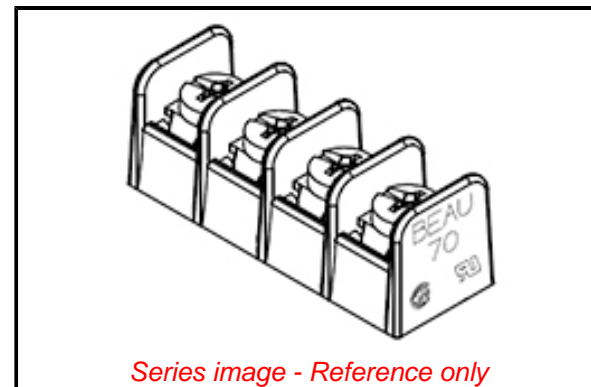

*Series image - Reference only*

**EU ELV**

**Not Reviewed**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Reviewed**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

|                 |              |
|-----------------|--------------|
| China ROHS      | Not Reviewed |
| ELV             | Not Reviewed |
| RoHS Phthalates | Not Reviewed |

**Search Parts in this Series**

[38700 Series](#)

This document was generated on 07/12/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**