


REV. A
DCO 144181

COIL: @ 25°C	
RESISTANCE	600 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	22.5 mADC
MUST RELEASE	14.0 mADC MAX., 4.5 mADC MIN.

ENVIRONMENT:	
VIBRATION	10 Hz TO 2000 Hz @ 30 g's
SHOCK	90 g's 11 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE TIME 5 MS MAX.
	RELEASE TIME 4 MS MAX.
	CONTACT BOUNCE 2.5 MS MAX.

CUSTOMER DATA SHEET

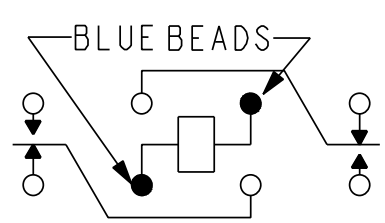

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO 2A
	28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 24APR2006 CK. J.M.B. 4/24/06

tyco ©COPYRIGHT 2005
Electronics TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. CII STD	TYCO NUMBER	CII PART NUMBER
CUST. NO. REV.	2-1617016-0	3SBK6072H2