


REV. 1
DCO 16356

COIL: @ 25°C	RESISTANCE	540 - 770 OHMS
	NOMINAL VOLTAGE	26.5 VDC
	MUST OPERATE	13.0 VDC
	MUST RELEASE	10.1 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:		
VIBRATION	10 CPS TO 2000 CPS @	15 g's
SHOCK	100 g's	6 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO	+125 °C

NOTES: OPERATE & RELEASE 6 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

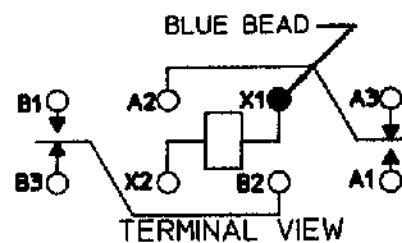

CONTACT RATING: 2A 28 VDC RESISTIVE 100,000 OPERATIONS MINIMUM

DR. PBB 5-5-00

CK. TLG 7-12-00

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M5757/10-054 REV.

'FW' RELAY

FW1201G03