

REV. 1


DCO 15943

COIL: @ 25°C	
RESISTANCE	310 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	5.6 VDC
MUST RELEASE	0.55 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	50	g's	11 ±1	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		
NOTES:	OPERATE 6 MS MAX					
	RELEASE 5 MS MAX					
	CONTACT BOUNCE 2 MS MAX					

CUSTOMER DATA SHEET

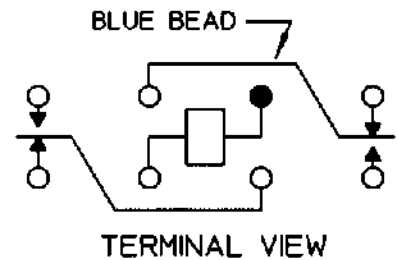

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/30/95 CK. GAH 11/22/99



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I. STD.
CUST. NO. _____ REV. _____

HMS RELAY

HMS1201S003