

REV. 0


DCO 170339

COIL: @ 25°C	
RESISTANCE	2500 OHMS $\pm 10\%$
NOMINAL VOLTAGE	8.0 mADC
MUST OPERATE	4.0 mADC
MUST RELEASE	2.0 mADC MAX 0.40 mADC MIN

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 15 g's
SHOCK	100 g's 6 MS DURATION
TEMPERATURE	-65 $^{\circ}\text{C}$ TO +125 $^{\circ}\text{C}$

NOTES:	OPERATE TIME 15 MS MAX
	RELEASE TIME 10 MS MAX
	CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

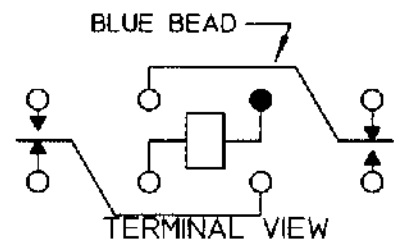

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	100,000 OPERATIONS

DR. PBB 12/6/00 CK.TLG 12-11-00

CII Technologies™
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-140 REV.

3SAT RELAY

3SAT1357A2