


COIL: @ +25° C  
 RESISTANCE 160 Ω ±10%  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 6.4 VDC  
 MUST RELEASE .7 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS AT 20 g's  
 SHOCK 100 g's 6 MS DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES:  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

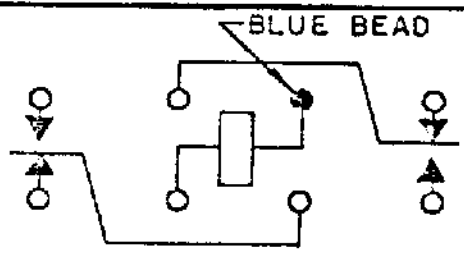

CONTACT RATING: Low level to 4A @ 28 VDC 100,000 Operation

DR. 4-26-82

CK. OSW



Communications Instruments, Inc.

CUST. CII STANDARD  
 CUST. NO. \_\_\_\_\_

TYPE HFW RELAY

HFW4A1201G00

SUPERSEDED  
NOT the LATEST REVISION