

REV. 0

DCO 170284


COIL: @ 25°C	
RESISTANCE	552 OHMS ±10%
NOMINAL VOLTAGE	20.0 - 29.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	7.0 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION	55	CPS TO	2000	CPS @	15	g's
SHOCK	50	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE 6 MS MAX.
RELEASE 5 MS MAX.
DIELECTRIC 1000 VAC. BOUNCE 2.5 MS MAX.

CUSTOMER DATA SHEET

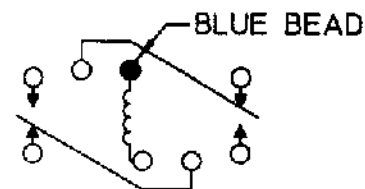

TERMINAL VIEW

CONTACT RATING:
2 AMPS @ 28 VDC, 100,000 OPERATIONS

DR. B.D. 10/5/00 CK. TLG 10-9-00

CIL Technologies™
advanced control electronic solutions

CUST CIL STD.
CUST. NO. REV.

3SAE RELAY 3SAE5014K1