

COIL: @ 25°C	
RESISTANCE	90 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.7 VDC
MUST RELEASE	1.0 VDC MIN.


ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE TIME 13 MS MAX.
	RELEASE TIME 5 MS MAX.
	CONTACT BOUNCE 5 MS MAX. (NO)
	2 MS MAX. (NC)

CUST.	HI-G
CUST. NO.	2T-1D-112

TYPE '07' RELAY

CUSTOMER DATA SHEET

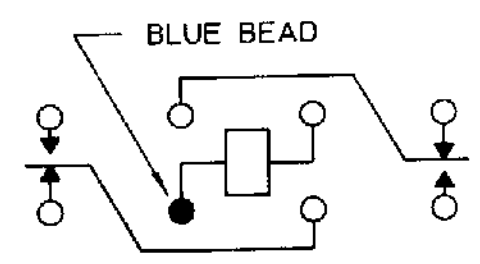

CONTACT RATING: 10 AMPS 30 VDC RES.
 10 AMPS 115 VAC 400 Hz. 6A 30 VDC
 INDUCTIVE 100,000 OPERATIONS

DR. R.B. 1/30/95 CK. *[Signature]*



B07B932BZ1-8010