


<b>COIL:</b>	
RESISTANCE	2074 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.4 VDC
MUST RELEASE	1.4 VDC

<b>ENVIRONMENT:</b>	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE 5 MS MAX
	RELEASE 3 MS MAX
	BOUNCE 3 MS MAX

**CUSTOMER DATA SHEET**

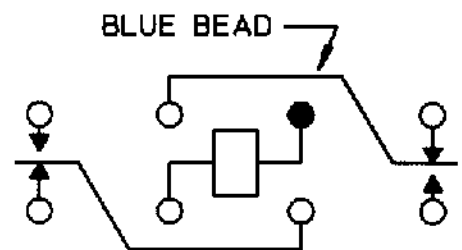

CONTACT RATING: LOW LEVEL TO 2A  
30 VDC RESISTIVE 100,000  
OPERATIONS MIN

DR. R.B. 5/20/92 | CK5/20/92 JMB



CUST. HI-G  
CUST. NO. 2KA-1B-126

TYPE 'HMS' RELAY

HMS1196S01