


UNIT OF MEASURE	A	B	C	D	E	L		MAX. DIA. EACH TWO BUNDLE	MIN. TENSILE STRENGTH
INCHES	.531	.293	.185	.236	0.46	8.25		.75	50 lbs.
MM	13.49	7.44	4.70	5.99	1.17	210.		19.05	22.68 kg.

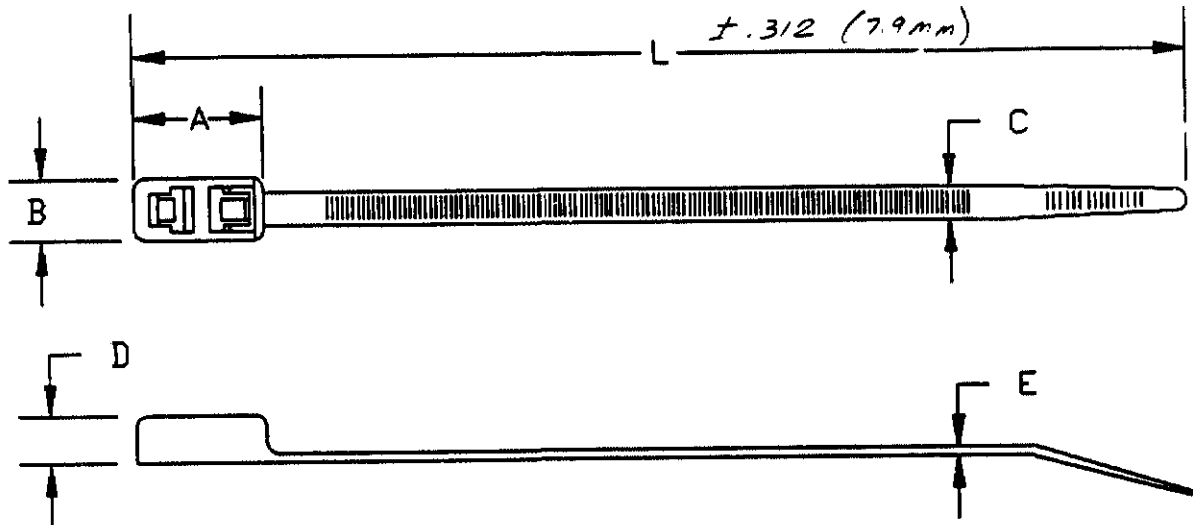

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

ARC ENGINEERING

JUL 13 1990

ISSUED BY *Acc*

CUSTOMER DRAWING UNPUBLISHED

2-608698-0	BLACK 1000 DHTY34MB	
1-608698-0	BLACK 100 DHTY34CB	
2-608698-9	NATURAL 1000 DHTY34M	
1-608698-9	NATURAL 100 DHTY34C	

LOG	D	
DIST	1	
	DWG SIZE	PART No.
	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)	
	QTY. REQ'D. PER ASSY.	PARTS LIST
		MATERIAL
		HEAT TREAT
		FINISH
		DRAWN BY: AD-TEK/ML
		DATE: 8/22/90
		APPROVED BY:
		CHECK BY: BJM 6/90
		RELEASE: J. Hamel 6/90
		AMP AMP INCORPORATED Harrisburg, Pa.
		NAME: DOUBLE HEAD
		CABLE TIE 8 1/4 INCH
	ECN 002890	7mt 6/90
	REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.	
	SCALE: A	DRAWING No. 608698
		SHEET: 1 OF 1
		REV.: G
P	F	LTR
	REVISION RECORD	APP DATE

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.