


| | |
|-----------------|----------------|
| COIL: @ +25 °C | |
| RESISTANCE | 700 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.5 VDC |
| MUST RELEASE | 1.5 VDC |

| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK | 100 g's 6 MS DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: OPERATE & RELEASE 4 MS MAX
 CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

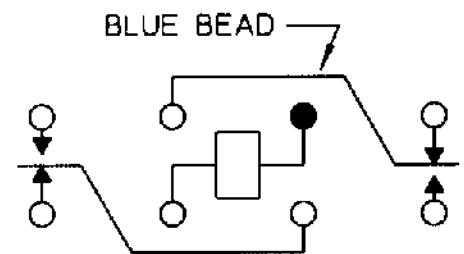

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE 100,000
 OPERATIONS

DR. R.B. 9/13/96 CK 180/1300

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. C. I. I. STD.
 CUST. NO.

TYPE "HF" RELAY

HF1201K00

SUPERSEDED
 NOT the LATEST
 REVISION