


C-917 Two Section Slide

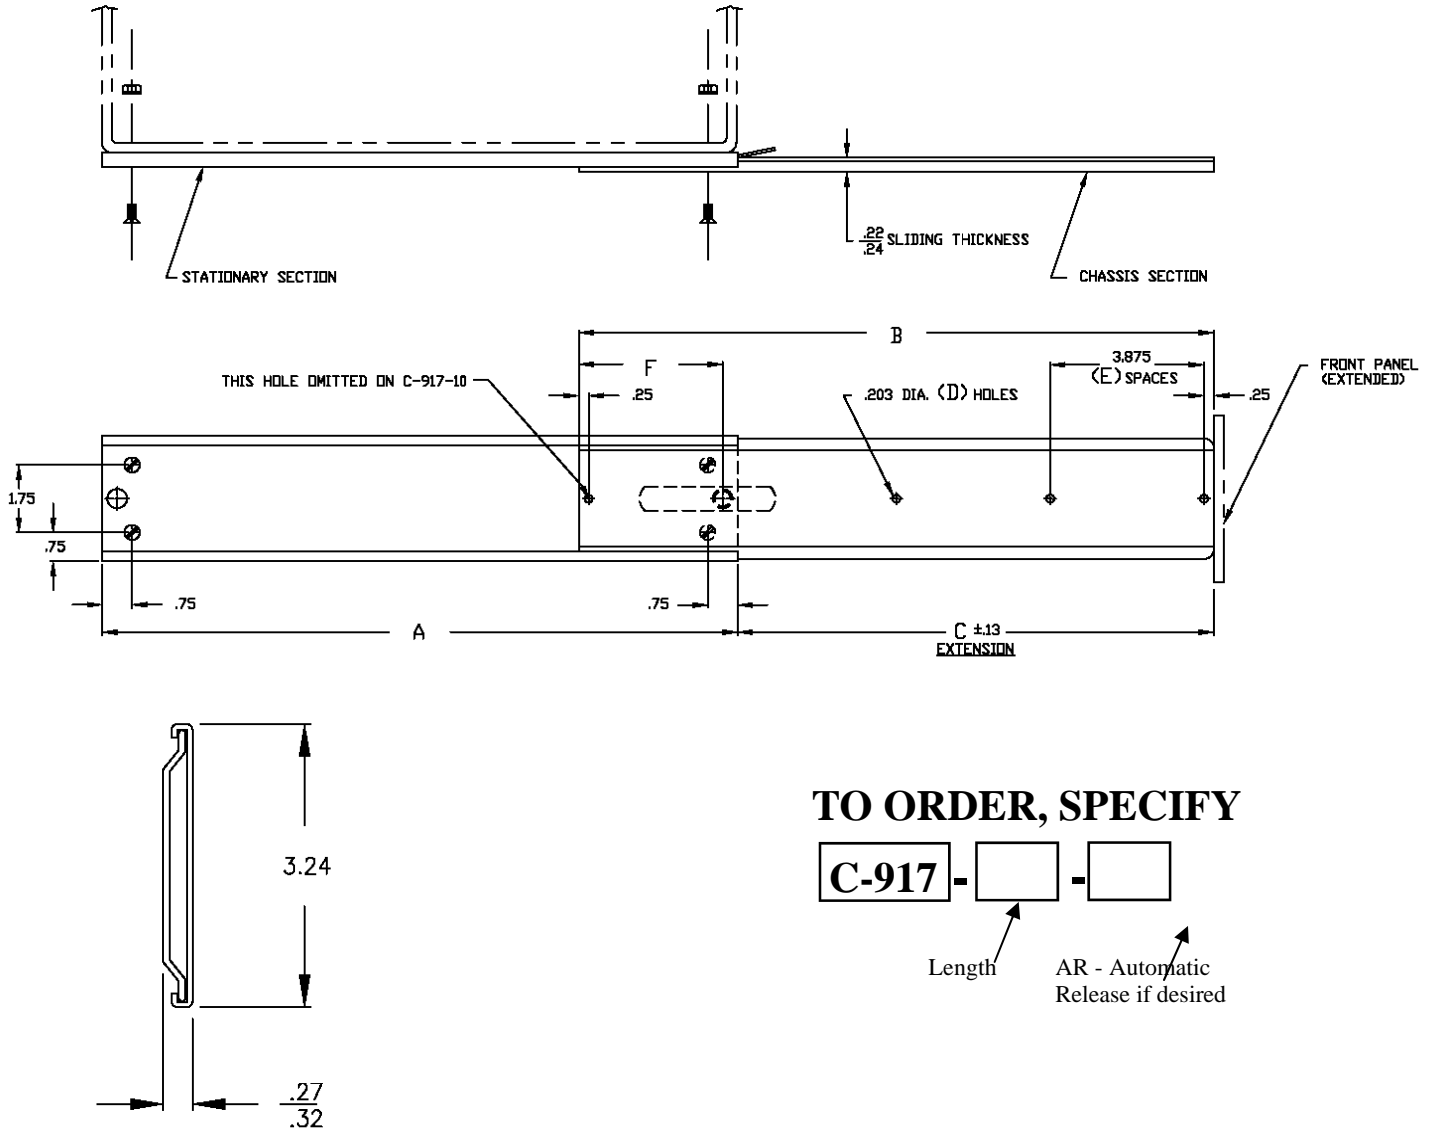

TO ORDER, SPECIFY

C-917 - -

Length

AR - Automatic Release if desired

Catalog Number	A	B	C	D	E	F	Load Capacity
C-917-10	10.00	10.00	7.50	2	1	2.13	140 LBS.
C-917-12	12.00	12.00	9.00	4	2	2.63	140 LBS.
C-917-14	14.00	14.00	10.50	4	2	3.13	135 LBS.
C-917-16	16.00	16.00	12.00	4	2	3.63	135 LBS.
C-917-18	18.00	18.00	13.50	5	3	4.13	135 LBS.
C-917-20	20.00	20.00	15.00	5	3	4.63	130 LBS.
C-917-22	22.00	22.00	16.50	5	3	5.13	130 LBS.
C-917-24	24.00	24.00	18.00	6	4	5.63	130 LBS.
C-917-26	26.00	26.00	19.50	6	4	6.13	125 LBS.
C-917-28	28.00	28.00	21.00	6	4	6.63	125 LBS.
C-917-30	30.00	30.00	22.50	6	4	7.13	125 LBS.

Notes

1. Finish: All standard slides are coated with Poxylube™ dry film lubricant.
2. All standard slides are designed to lock-out in the extended position and are available with an optional automatic release if lock-out is not desirable.
3. Standard hardware packages include all the hardware necessary to mount your Chassis Trak® slides:
 - #10-32 screws and keps nuts
4. All sliding members of the standard slide are made from cold rolled steel.
5. All Chassis Trak® solid bearing slides are supplied with a quick disconnect feature.
6. Optional mounting patterns, slide lengths and extensions are available.