


COIL: @ 25°c
 RESISTANCE 160 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 6.4 VDC
 MUST RELEASE .7 VDC

CUSTOMER DATA SHEET

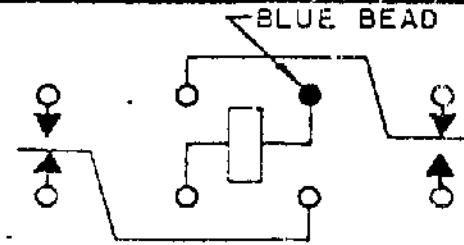

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS AT 20 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO
2 A @ 28 VDC

NOTES:

DR. 1-23-84 CK. OSW



CUST. CII STD
 CUST. NO. _____

TYPE **HFV RELAY**

HFV 1201G00

SUPERSEDED
NOT THE LATEST REVISION