

REV. 0

DCO 15679


COIL: @ +25 °C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	15 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE 4 MS MAX  
RELEASE 2 MS MAX  
BOUNCE 3 MS MAX

CUSTOMER DATA SHEET

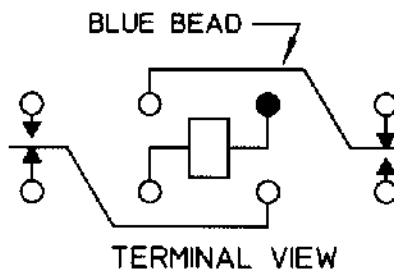

CONTACT RATING:	2A 30 VDC
RESISTIVE	.75A 30 VDC INDUCTIVE
	100,000 OPERATIONS

DR. B.D. 6/1/99 CK. GQH 6-1-99

COMMUNICATIONS  
INSTRUMENTS, INC.

CUST. HI-G  
CUST. NO. 2K-4A-126

TYPE 'HFW' RELAY

HF1501S26