

SUMMARY



Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Download

[Request a quote](#)

[Catalog](#)

Series	2S
Termination type	No contacts / Accessory
IP rating	61
Cable Ø	0.00 - 0.00 mm
Matching parts	xxx

TECHNICAL DETAILS

Mechanics

Shell Style/Model	BRR*: Cap spring loaded dust cap for ERA,ERN and EG receptacle or PSA and PK fixed receptacle
Keying	
Housing Material	PSU (Polysulfone) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅0 - 0 mm
Variant	G : Grey

Performance

Configuration
Insulator
Rated Current


Others

Endurance (Shell): 5000 mating cycles
Temp (min / max): -50°C / +150°C
Axes material: Nickel-plated brass
Maximum operating temperature: 100°C

Watertightness: IP61 according to IEC 60529
IP Rating: 61

DRAWINGS

Draws

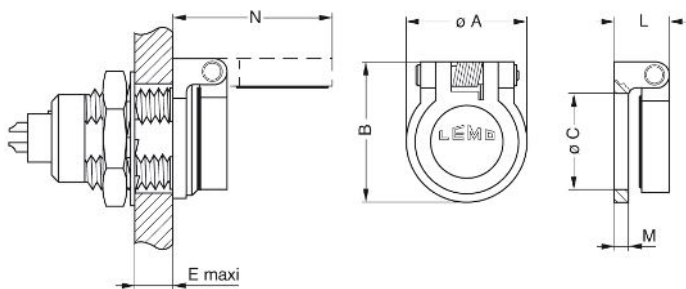

Dimensions

	A	B	C	E	L	M	N
mm.	18.6	22.4	15.2	6.5	8.2	2	26.2
in.	0,73	0,88	0,60	0,26	0,32	0,08	1,03

RECOMMENDED BY LEMO

Tools

None

Cables