


COIL: @ 25°C	
RESISTANCE	300 OHMS ± 10%
NOMINAL VOLTAGE	28.0 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	7.0 VDC MAX. 15 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C
NOTES: OPERATE & RELEASE 10 MS MAX.	
OPERATE BOUNCE 2 MS MAX.	
RELEASE BOUNCE 5 MS MAX.	

CUSTOMER DATA SHEET

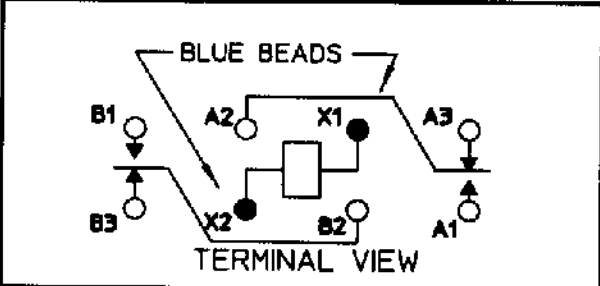

CONTACT RATING: 10 AMPS 28 VDC
115 VAC/400 HZ, 1 PHASE.
100,000 OPERATIONS

DR. PBB 6/2/00 CK. TLG 6-2-00

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. MS27247-1 REV. ---

07 RELAY B07D111BC4-0006