Marrette[®] **Black**[™] High Temperature




The Marrette® Black™'s High Temperature rating makes it the best solution for high wattage lighting fixtures and signs.

External Cap

- Made of rugged, phenolic material 150°C rated.
- Large, finely ribbed, "barrel-shaped" cap makes it easier to grip even when hands are greasy or damp.
- Deep, wide throat ensures full insulation coverage.
- Threaded entry helps guide large wire bundles right into the spring.

Inner Spring

- Internal round spring design multiplies the "twist-on" torque applied by the leverage and wedge action, to firmly crush wires into a solid joint.
 - Model # 37 Black[™] uses a square wire expansion spring for additional gripping
 - spring for additional gripping power on large conductor combinations.
- Unique copper-coated spring helps resist corrosion.
- CSA (LR6591), UL (424H)
- Model nos. 29 & 30 Black™ are approved for circuit and fixture type connections up to 300V only.
- Model nos. 31, 33, 35 & 37 Black™ are approved for circuits up to 600V, and lighting fixtures and signs up to 1000V.
- For copper conductors only.
- Convenient packaging sized right and job-site ready!

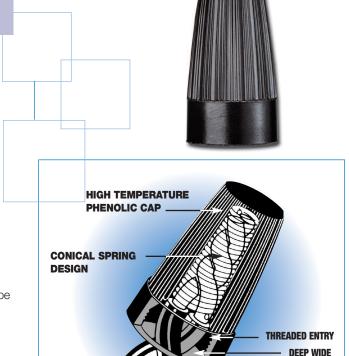

Ordering Information

		AWG Wire Range							
Model	Colour	22	20	18	16	14	12	10	8
29	black								
30	black								
31	black								
33	black								
35	black								
37	black								

Note: Refer to pages 20 and 21 for related Wire Combination Reference Guides.



THROAT

Packaging Options Marrette[®] Black[™] High Temperature

marrette

