


UNIT OF MEASURE	A	B	C	D	E	L		MAX. DIA EACH TWO BUNDLES	MIN. TENSILE STRENGTH
INCHES	.521	.304	.184	.238	.054	15.37		2.0	50 lbs.
MM	13.2	7.7	4.7	6.0	1.4	390.		50.8	22.68 kg.

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

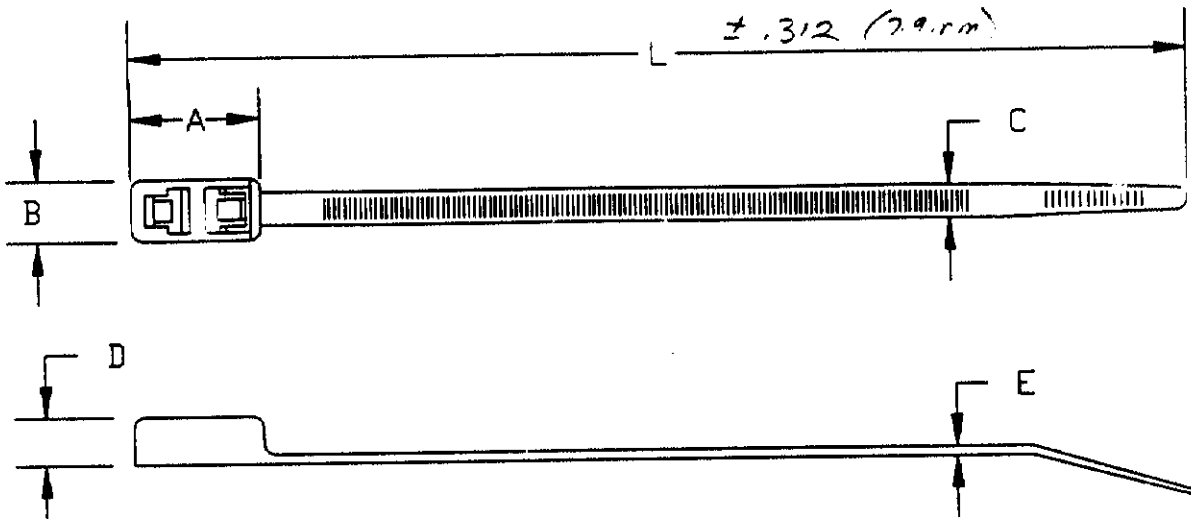

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

APC ENGINEERING

JUL 13 1990

ISSUED BY AM

CUSTOMER DRAWING UNPUBLISHED

2-608700-0	BLACK 1000 DHTY2MB	
1-608700-0	BLACK 100 DHTY2CB	
2-608700-9	NATURAL 1000 DHTY2M	
1-608700-9	NATURAL 100 DHTY2C	

LOG	D	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
DIST	1		REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)		

QTY. REQ'D. PER ASSY.		PARTS LIST			
		MATERIAL	HEAT TREAT	FINISH	
		DIMENSIONS ARE IN INCHES		DRAWN BY: AD-TEK/VL	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DATE: 8/25/90	
		2 PL DEC ±		APPROVED BY: J. Harned 6/90	
		3 PL DEC ± .039		CHECK BY: BJM 6/90	
		4 PL DEC ±		RELEASE:	
		ANGLES ±		AMP AMP INCORPORATED Harrisburg, Pa.	
		SURF TEXTURE: J			
		REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.		NAME: DOUBLE HEADED	
				CABLE TIE 15 1/2 INCH	

✓	0	ECN 062890	APP	DATE	SCALE: A	DRAWING No.: 608700	SHEET: 1 OF 1	REV.: □
---	---	------------	-----	------	----------	---------------------	---------------	---------