

COSEL AC-DC Power Supplies DIN Rail type

KHEA/KHNA60F

Ordering information

KH A 60 F - -

① ② ③ ④ ⑤ ⑥



- ① Series name
KHE : Euro style I/O terminals
KHN : Barrier blocks style I/O terminals
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Option
C : with Coating

| | | |
|-----------------------|-----------------|-----------------|
| MODEL | KHEA/KHNA60F-12 | KHEA/KHNA60F-24 |
| MAX OUTPUT WATTAGE[W] | 54 | 60 |
| DC OUTPUT | 12V 4.5A | 24V 2.5A |

SPECIFICATIONS

| | MODEL | KHEA/KHNA60F-12 | KHEA/KHNA60F-24 | |
|------------------------------------|--|--|--|-----------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ (Output derating is required) or DC120 - 370 | | |
| | CURRENT[A] | ACIN 115V | 1.00typ | 1.10typ |
| | | ACIN 230V | 0.60typ | 0.70typ |
| | FREQUENCY[Hz] | 50 / 60 (47 - 440) or DC | | |
| | EFFICIENCY[%] | ACIN 115V | 87.0typ | 89.0typ |
| | | ACIN 230V | 88.0typ | 91.0typ |
| | INRUSH CURRENT[A] | ACIN 115V | 18typ (I _o =100%) (at cold start Ta=25°C) | |
| | *1 ACIN 230V | 35typ (I _o =100%) (at cold start Ta=25°C) | | |
| LEAKAGE CURRENT[mA] | 0.45 / 0.75max (ACIN 100V / 240V 60Hz, I _o =100%, According to IEC60950-1 and DEN-AN) | | | |
| OUTPUT | VOLTAGE[V] | 12 | 24 | |
| | CURRENT[A] | 4.5 | 2.5 | |
| | PEAK CURRENT[A] | - | - | |
| | LINE REGULATION[mV] | *2 48max | 96max | |
| | LOAD REGULATION[mV] | *2 100max | 150max | |
| | RIPPLE[mVp-p] | 0 to +70°C | 200max | 200max |
| | | -20 - 0°C | 300max | 300max |
| | | I _o =0 - 30% | 300max *4 | 300max *4 |
| | RIPPLE NOISE[mVp-p] | 0 to +70°C | 260max | 260max |
| | | -20 - 0°C | 360max | 360max |
| | | I _o =0 - 30% | 360max *4 | 360max *4 |
| | TEMPERATURE REGULATION[mV] | 0 to +70°C | 120max | 240max |
| | | -20 to +70°C | 150max | 290max |
| DRIFT[mV] | *5 48max | 96max | | |
| START-UP TIME[ms] | 200typ (ACIN 115V, I _o =100%) | | | |
| HOLD-UP TIME[ms] | 20typ (ACIN 115V, I _o =100%) | | | |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 10.80 to 13.20 | | | |
| OUTPUT VOLTAGE SETTING[V] | 12.00 to 12.48 | | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically *10 | | |
| | OVERVOLTAGE PROTECTION[V] | 13.80 to 16.80 | | |
| | DC_OK LAMP | LED (Green) | | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | |
| | INPUT-PE | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | |
| | OUTPUT-PE | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At Room Temperature) | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -20 to +70°C (Required to Derating), 20 - 90%RH (Non condensing) | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -30 to +85°C, 20 - 90%RH (Non condensing) | | |
| | VIBRATION | *8 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60 minutes along Z axis (Non operating, mounted on DIN Rail) | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axis (Packing state) | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS (At only AC input) | UL60950-1, C-UL(CSA60950-1), UL508 (NEC Class2 per UL1310), ANSI/ISA12.12.01, EN60950-1, EN50178 Complies with DEN-AN | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 (Class A) *6 (Not built-in to active filter) *9 | | |
| OTHERS | CASE SIZE | *7 32×90×90mm (W×H×D) [1.26×3.54×3.54 inches] | | |
| | WEIGHT | 270g max | | |
| | COOLING METHOD | Convection / Forced air | | |

*1 The value is primary surge. The current of input surge to a built-in EMI/EMC Filter(0.2ms or less) is excluded.
 *2 Please contact us about dynamic load and input response.
 *3 This is the value that measured on measuring board with capacitor of 22μF and 0.1μF at 150mm from output terminal.
 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103). Please refer to the instruction manual 2.7.
 Ripple and ripple noise spec is change at I_o=0 to 30% by burst operation.
 *4 In case of operating under 0°C ambient temperature, the value is two times of specification at 0 to 30% load factor.
 *5 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


*6 Please contact us about another class.
 *7 Case size contains neither the umbo.
 *8 Only as standard mounting orientation (A). Refer to the instruction manual 5.1.
 If install other than standard mounting orientation (A), please fix the power supply for withstand the vibration and impact.
 *9 When two or more units are operating it may not comply with the IEC61000-3-2.
 *10 If the overcurrent protection circuit operates continuously, the output voltage shut down. Refer to the instruction manual 2.3.
 * To meet the specifications. Do not operate over-loaded condition.
 * A sound may occur from power supply at light or peak loading.

Specifications are subject to change without notice. It is responsibility of each customer to thoroughly test each product and part number under their unique parameters and environments to ensure a product will work properly and reliably.

Click below for more details, to buy on-line or request volume pricing:
<http://power.sager.com/cosel-KHEA60F-power-supply.html>

(866) 588-1750
 power@sager.com
<http://power.sager.com>


Block diagram

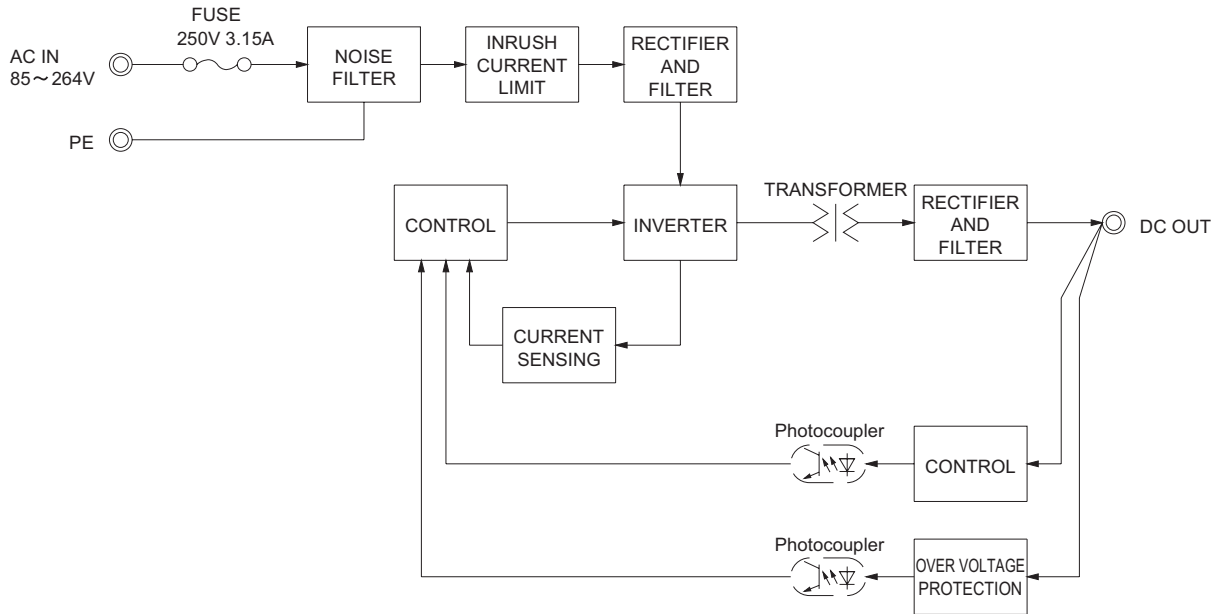


External view

<KHEA60F(Euro Style I/O Terminals)>

<KHNA60F(Barrier Blocks Style I/O Terminals)>

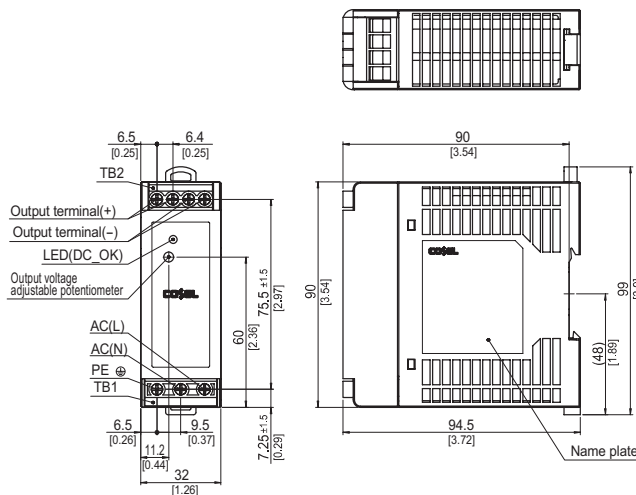

- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 270g max
- ※ PCB Material/thickness : FR-4 / 1.6mm [0.06]
- ※ Chassis · Case material : PBT
- ※ Din rail attachment material : PC/ABS
- ※ Dimensions in mm, [] = inches
- ※ Screw tightening torque : 1N · m max

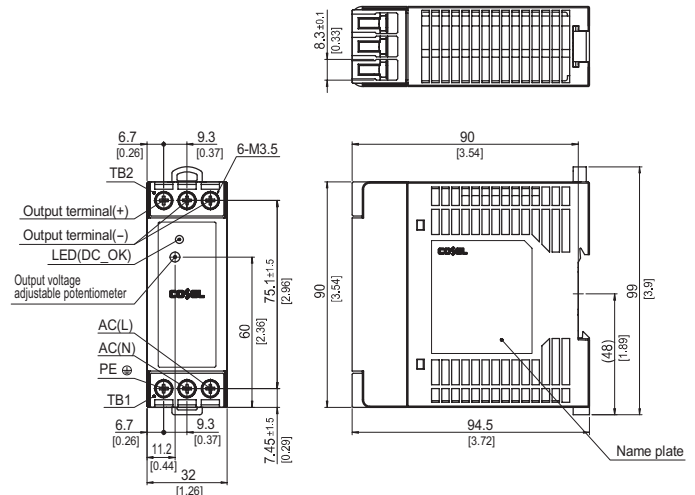

- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 270g max
- ※ PCB Material/thickness : FR-4 / 1.6mm [0.06]
- ※ Chassis · Case material : PBT
- ※ Din rail attachment material : PC/ABS
- ※ Dimensions in mm, [] = inches
- ※ Screw tightening torque : 1N · m max

Specifications are subject to change without notice. It is responsibility of each customer to thoroughly test each product and part number under their unique parameters and environments to ensure a product will work properly and reliably.