

REV. 3

DCO 102478


COIL: @ 25°C	
RESISTANCE	14-21 OHMS
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.2 VDC
MUST RELEASE	1.8 VDC MAX .4 VDC MIN

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	50	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 15 MS MAX.  
OPERATE BOUNCE 5 MS MAX.  
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

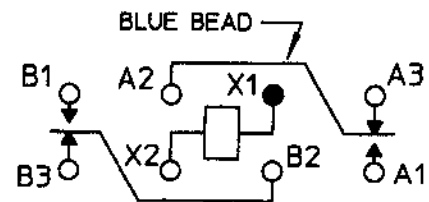

TERMINAL VIEW

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	50,000 OPERATIONS

DR. R.B. 8/10/94 | CK. TLG 11-28-00



CUST. QPL  
CUST. NO. M5757/23-015 REV.

\*07" RELAY

B07D034BA2-0125