


COIL: @ +25 °C  
 RESISTANCE 400 OHMS ± 10%  
 NOMINAL VOLTAGE 24.0 VDC  
 MUST OPERATE 17.0 VDC  
 MUST RELEASE 1.4 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 500 CPS @ 10 g's  
 SHOCK 30 g's 6 MS. DURATION  
 TEMPERATURE -55 °C TO +125 °C

NOTES: OPERATE TIME 5 MS MAX.  
RELEASE TIME 3 MS MAX.

CUSTOMER DATA SHEET

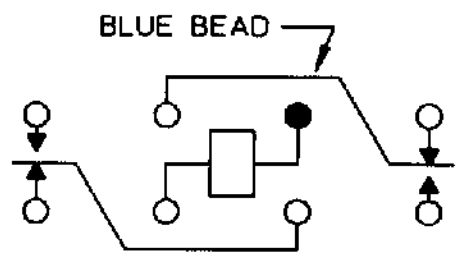

CONTACT RATING: 5A 30 VDC  
 RESISTIVE 100,000 OPERATIONS

DR. R.B. 7/24/92 CK. 7/24/92



CUST. HI-G  
 CUST. NO. FS5-2A-124P

TYPE HFW5A RELAY

HFW5A1201S501