

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0010845020](#)
Status: **Active**
Overview: [MLX Power Connectors](#)
Description: 6.35mm Pitch MLX Power Connector Header, Vertical, 2 Circuits, Polyester 94V-0, Tin (Sn) Plating, White

Documents:

| | |
|--|--|
| 3D Model | Packaging Specification PK-43255-001-001 (PDF) |
| Drawing (PDF) | Packaging Specification PK-43255-003-001 (PDF) |
| Product Specification PSX-42002-0001-001 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|--------------------------------------|
| Product Family | PCB Headers |
| Series | 42002 |
| Application | Power, Wire-to-Board |
| Comments | Solder Type |
| Overview | MLX Power Connectors |
| Product Name | MLX |
| UPC | 800754319607 |


Physical

| | |
|--------------------------------|-----------------|
| Breakaway | No |
| Circuits (Loaded) | 2 |
| Circuits (maximum) | 2 |
| Color - Resin | Natural |
| Durability (mating cycles max) | 50 |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Guide to Mating Part | Yes |
| Keying to Mating Part | Yes |
| Lock to Mating Part | Yes |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Tin |
| Material - Resin | Polyester |
| Net Weight | 1.480/g |
| Number of Rows | 1 |
| Orientation | Vertical |
| PC Tail Length | 4.27mm |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 1.57mm |
| Packaging Type | Bag |
| Pitch - Mating Interface | 6.35mm |
| Pitch - Termination Interface | 6.35mm |
| Polarized to PCB | Yes |
| Shrouded | Fully |
| Surface Mount Compatible (SMC) | No |
| Temperature Range - Operating | -55°C to +105°C |
| Termination Interface: Style | Through Hole |

Electrical

| | |
|-------------------------------|--------------|
| Current - Maximum per Contact | 13.5A, 20.0A |
|-------------------------------|--------------|

Solder Process Data

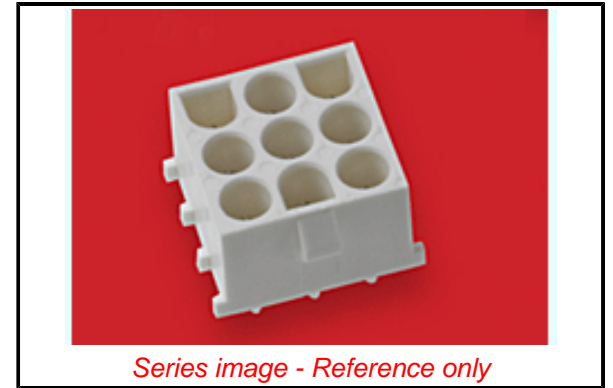

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/30/2017 (7 July
2017)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[42002 Series](#)

Mates With

[42021 Plug](#)

| | |
|--|------|
| Duration at Max. Process Temperature (seconds) | 010 |
| Lead-freeProcess Capability | WAVE |
| Process Temperature max. C | 260 |

Material Info

| | |
|--------------------|--------------|
| Engineering Number | 42002-02C1A1 |
|--------------------|--------------|

Reference - Drawing Numbers

| | |
|-------------------------|------------------------------------|
| Packaging Specification | PK-43255-001-001, PK-43255-003-001 |
| Product Specification | PSX-42002-0001-001 |
| Sales Drawing | SDA-42002-***** |

This document was generated on 07/12/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION