


REV. 0

DCO 170339

COIL: @ 25°C	
RESISTANCE	1000 OHMS ± 10%
NOMINAL VOLTAGE	13.0 mADC
MUST OPERATE	6.5 mADC
MUST RELEASE	3.1 mADC MAX, .65 mADC MIN

CUSTOMER DATA SHEET

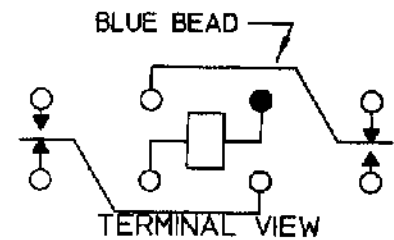

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 12/6/00

CK. TLG 12-6-00

**CI Technologies**  
advanced control electronic solutions

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	15	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE TIME 15 MS MAX  
RELEASE TIME 10 MS MAX  
CONTACT BOUNCE 2 MS MAX

CUST.	QPL
CUST. NO.	M5757/13-086 REV.

3SAT RELAY

BSAT1303A2