


REV. 1 1/30/95

COIL:	
RESISTANCE	330 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	2.0 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	
OPERATE TIME	13 MS MAX.
RELEASE TIME	5 MS MAX.
CONTACT BOUNCE	5 MS MAX. (NC) 2 MS MAX. (NO)

CUSTOMER DATA SHEET

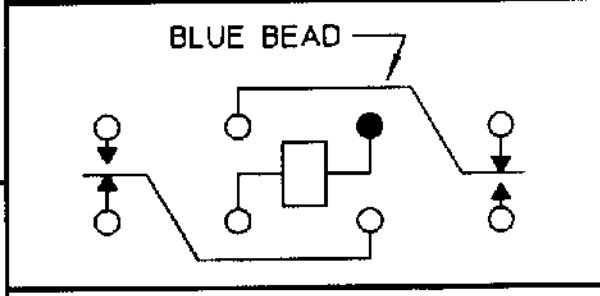

CONTACT RATING:	10 AMPS 30 VDC RES.
	10 AMPS 115 VAC 400 HZ. 6A 30 VDC
	INDUCTIVE 100,000 OPERATIONS

DR. R.B. 4/13/93 CK. 1/30/95



CUST.	HI-G
CUST. NO.	2T-1A-126

TYPE '07' RELAY

B07B032BZ1-8001