

## DESCRIPTION

The PMP85SF series of AC/DC switching power supplies are for 85 watts of continuous output power. They are enclosed in a 94V-0 rated polycarbonate case with an IEC320/C8 inlet to mate with interchangeable cord for world-wide use. All models meet EN55011 and FCC class B emission limits, and are designed for medical applications, not for life-supporting equipment.

## FEATURES

- High efficiency
- Low safety ground leakage current
- Wide input range 90 to 264 VAC
- 100% burn-in
- Overvoltage protection
- Short-circuit protection
- Overpower protection
- Compliant with CEC and Energy Star Efficiency level V requirements
  - \* No load power consumption less than 0.5 W
  - \* Average active efficiency greater than 87%
- Compliant with RoHS requirements
- Compliant with IPX1

## INPUT SPECIFICATIONS

|                  |  |
|------------------|--|
| Input voltage:   | 90-264 VAC   |
| Input frequency: | 47-63 Hz   |
| Input current:   | 1.70 A (rms) for 115 VAC<br>0.90 A (rms) for 230 VAC |
| Touch current:   | 100 µA max. @ 264 VAC, 63 Hz                         |

## OUTPUT SPECIFICATIONS

|                          |   |
|--------------------------|---|
| Output voltage /current: | See rating chart.   |
| Maximum output power:    | See rating chart.   |
| Ripple and noise:        | 1% peak to peak maximum   |
| Overvoltage protection:  | Provided and set at 112-140% of its nominal output voltage  |
| Overcurrent protection:  | Protected to short circuit conditions   |
| Temperature coefficient: | ±0.04% /°C maximum  |
| Transient response:      | Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change |

## ENVIRONMENTAL SPECIFICATIONS

|                        |  |
|------------------------|--|
| Operating temperature: | 0°C to +60°C                                       |
| Storage temperature:   | -40°C to +85°C                                     |
| Relative humidity:     | 5% to 95% non-condensing                           |
| Derating:              | Derate from 100% at +40°C linearly to 50% at +60°C |

## PMP85SF SERIES



## SAFETY STANDARD APPROVALS



UL ES 60601-1, CSA C22.2 No. 60601-1  
File No. E211696

TÜV EN 60601-1

## GENERAL SPECIFICATIONS

|                                |  |
|--------------------------------|--|
| Switching frequency:           | 75-100 KHz   |
| Efficiency:                    | 87% min.   |
| Hold-up time:                  | 10 ms minimum at 110 VAC   |
| Line regulation:               | ±0.5% maximum at full load   |
| Inrush current:                | 40 A @ 115 VAC or 80 A @ 230 VAC, at 25°C cold start   |
| Withstand voltage:             | 4000 VAC from input to output (2 MOPP)   |
| MTBF:                          | 150,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217F                               |
| EMC Performance (IEC60601-1-2) |  |
| EN55011:                       | Class B conducted, class B radiated  |
| FCC:                           | Class B conducted, class B radiated  |
| VCCI:                          | Class B conducted, class B radiated  |
| EN61000-3-2:                   | Harmonic distortion, class A   |
| EN61000-3-3:                   | Line flicker   |
| EN61000-4-2:                   | ESD, ±8 KV air and ±6 KV contact   |
| EN61000-4-3:                   | Radiated immunity, 3 V/m   |
| EN61000-4-4:                   | Fast transient/burst, ±2 KV  |
| EN61000-4-5:                   | Surge, ±1 KV diff., ±2 KV com.   |
| EN61000-4-6:                   | Conducted immunity, 3 Vrms   |
| EN61000-4-8:                   | Magnetic field immunity, 3 A/m   |
| EN61000-4-11:                  | Voltage dip immunity, 30% reduction for 500 ms, 60% reduction for 100 ms, and >95% reduction for 10 ms |

## UNIVERSAL INPUT

## PMP85SF MEDICAL SERIES


### OUTPUT VOLTAGE/CURRENT RATING CHART

| Model        | Output   |        |              |              |      |                               | Average Active Efficiency (typical) @ 115 / 230 Vac |            |
|--------------|----------|--------|--------------|--------------|------|-------------------------------|---|------------|
|              | Class II | V1     | Min. Current | Max. Current | Tol. | Ripple & Noise <sup>(1)</sup> |   | Max. Power |
| PMP85SF-13-1 |          | 18.0 V | 0 A          | 4.72 A       | ±5%  | 180 mV                        | 85 W  | 88 /89%    |
| PMP85SF-13-2 |          | 19.0 V | 0 A          | 4.47 A       | ±5%  | 190 mV                        | 85 W  | 88 /89%    |
| PMP85SF-14   |          | 24.0 V | 0 A          | 3.54 A       | ±5%  | 240 mV                        | 85 W  | 88 /90%    |

NOTES:

1. Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

### MECHANICAL SPECIFICATIONS

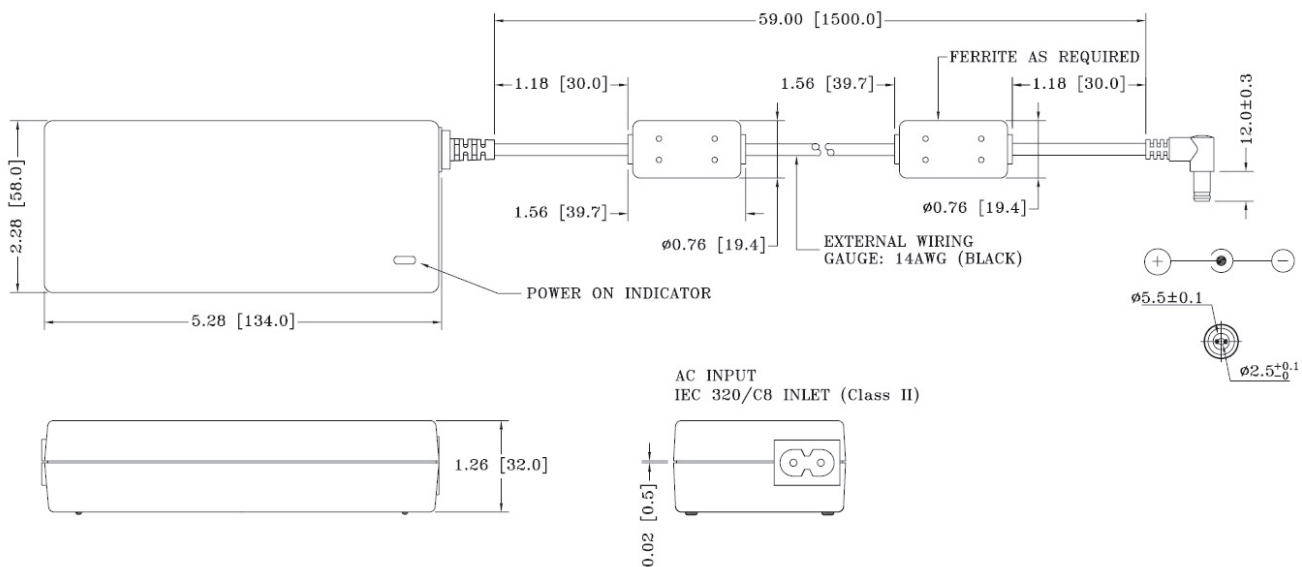

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Weight: 410 grams (0.906 lbs.) approx.

### OUTPUT POWER DERATING CURVE

