

REV. 0  
DCO 16653


COIL: @ 25°C	
RESISTANCE	180 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.7 VDC
MUST RELEASE	5.4 MAX., 0.85 MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	10	g's
SHOCK	50	g's	6	MS. DURATION		
TEMPERATURE	-14	°C TO	+125	°C		

NOTES: OPERATE 6 MS MAX  
RELEASE 4 MS MAX  
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

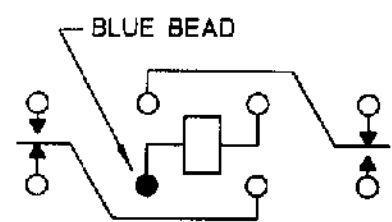

TERMINAL VIEW

CONTACT RATING: 50 µA @ 50 mV PEAK
AC OR DC 100,000,000 OPERATIONS
2 AMPS 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 11/30/00 CK. TLG 11-30-00



CUST. C. I. I. STD.  
CUST. NO. REV.

"3SCV" RELAY 3SCV5004D1