


COIL: @ 25°C	
RESISTANCE	330 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	2.0 VDC MIN.

**CUSTOMER DATA SHEET**

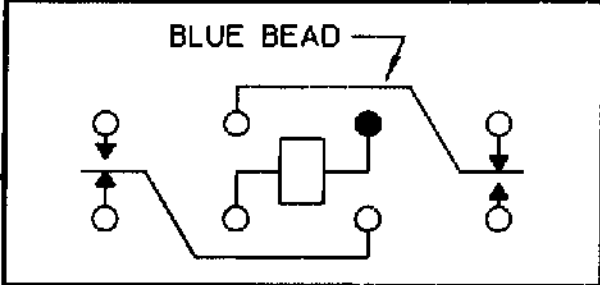

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

CONTACT RATING:	10 AMPS 30 VDC RES.
	10 AMPS 115 VAC 400 Hz. 6A 30 VDC
	INDUCTIVE 100,000 OPERATIONS

NOTES:	OPERATE TIME 13 MS MAX.
	RELEASE TIME 5 MS MAX.
	CONTACT BOUNCE 5 MS MAX. (NC)
	2 MS MAX. (NO)

DR. R.E. 1/12/95 CK. 1/12/95

**COMMUNICATIONS INSTRUMENTS, INC.**

CUST.	HI-G
CUST. NO.	2T-1B-126

TYPE '07' RELAY

**B07B932BZ1-8005**