


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0785880002**
Status: **Active**
Overview: DDR3 DIMM Sockets
Description: 1.00mm Pitch DIMM DDR3 Socket, Ultra Low Profile, Through Hole, Vertical, Black with Black Latches, 1.5V Voltage Key, 240 Circuits, 0.762mm Gold (Au) Plating, Lead-Free

Documents:

3D Model	Application Specification AS-78588-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-78588-002 (PDF)
Product Specification PS-78588-002-001 (PDF)	RoHS Certificate of Compliance (PDF)

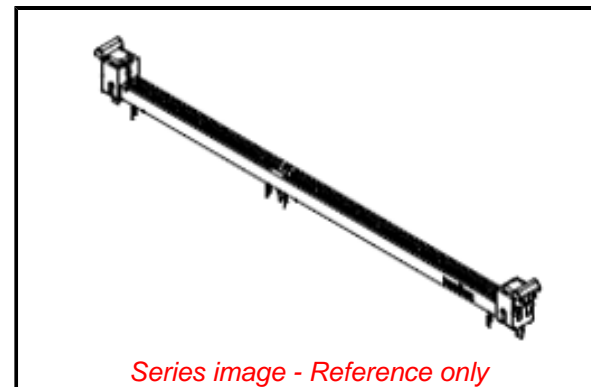

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Memory Module Sockets
Series	<u>78588</u>
Component Type	Socket
Electrical Model	Yes
JEDEC Outline	PS-001
Overview	<u>DDR3 DIMM Sockets</u>
Product Name	DDR3 DIMM
UPC	884982911888

Physical

Circuits (Loaded)	240
Circuits (maximum)	240
Durability (mating cycles max)	25
Entry Angle	Vertical
Flammability	94V-0
Housing Color	Black
Keying to Mating Part	Yes
Latch Color	Black
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin, Nickel
Material - Resin	High Temperature Thermoplastic
Net Weight	5.385/g
PC Tail Length	3.18mm
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Packaging Type	Tray
Pitch - Mating Interface	1.00mm
Plating min - Mating	0.762µm
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	29V AC (RMS)/DC
Voltage Key	Center

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	002

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2018 (15
January 2018)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

78588 Series

Mates With

JEDEC Standard 1.27mm Modules

Process Temperature max. C

260

Material Info

Reference - Drawing Numbers

Application Specification	AS-78588-001-001
Electrical Model Document	EE-78588-001
Packaging Specification	PK-78588-002
Product Specification	PS-78588-002-001
S-Parameter Model	SP-78588-001
Sales Drawing	SD-78588-002

This document was generated on 07/16/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION