


REV. 0  
DCO 170598

COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 552 OHMS MAX.  
 NOMINAL VOLTAGE \_\_\_\_\_ 24.0 VDC  
 MUST OPERATE \_\_\_\_\_ 11.1 VDC  
 \_\_\_\_\_  
 MUST RELEASE \_\_\_\_\_ 7.0 VDC MAX, 1.2 VDC MIN.

ENVIRONMENT:  
 VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 2000 \_\_\_\_\_ CPS @ \_\_\_\_\_ 20 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 50 \_\_\_\_\_ g's \_\_\_\_\_ 11 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -65 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C  
 NOTES: OPERATE 6 MS MAX.  
 RELEASE 5 MS MAX. BOUNCE 2.5 MS

CUSTOMER DATA SHEET

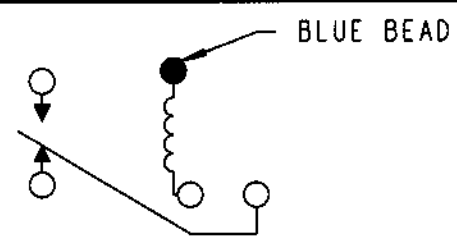

TERMINAL VIEW

CONTACT RATING: 2 AMPS 28 VDC,  
 1 AMP 115 VAC (CASE NOT GROUNDED)

DR. ASB 11/27/01 CK. TLG 11-27-01

**CII Technologies**  
 advanced control electronic solutions

CUST. \_\_\_\_\_ G.E.  
 CUST. NO. 352791G20189 REV. \_\_\_\_\_

3SAE RELAY

3SAE2440A2

NOT the LATEST REVISION