


COIL: @ +25 °C  
 RESISTANCE 160 OHMS ± 10%  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 6.5 VDC  
 MUST RELEASE .75 VDC

CUSTOMER DATA SHEET

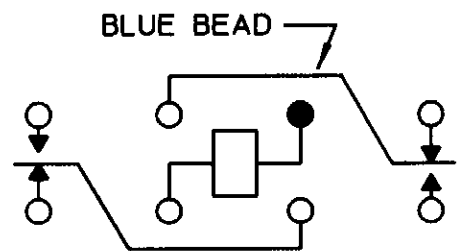

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: 2 AMPS 28 VDC  
RESISTIVE 100,000 OPERATIONS

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

DR. R.B. 8/24/94 CK. 3/29/94 *gmb*



CUST. HI-G  
 CUST. NO. 2K-2A-112

TYPE "HFW" RELAY

HFW1201S117