


REV. 0
DCO 15864

COIL: @ 25°C	
RESISTANCE	1250 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.0 VDC
MUST RELEASE	15 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE & RELEASE 4 MS MAX. CONTACT BOUNCE 2.0 MS MAX.	

CUSTOMER DATA SHEET

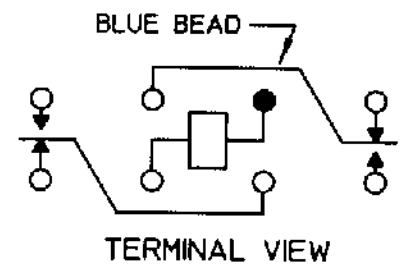

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 10/14/99 *CK* 10/14/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.
CUST. NO. STANDARD REV.

'HFV' RELAY HFW1230D00