

**300 WATTS CONVECTION
350 WATTS W/ 18 CFM**



Features:


- With built-in PFC
- Only 1.5 inch height
- 6.0 Watt per cubic inch
- With ITE & Medical (-M) safety
- No load input power < 0.5W
- Average efficiency > 87%
- Operation from -20°C to 70°C by convection

General Specifications:

Input voltage 90 VAC to 264 VAC
 Input frequency 47 Hz to 63 Hz
 Power factor > 0.93
 Inrush current less than 30A at 115VAC
 or 60A at 230VAC cold start, 25°C
 Efficiency 87%~93% depends on models
 Hold up time >20 ms
 at rated load and 115VAC
 Over load protection auto recovery
 Short circuit protection auto recovery
 Energy saving meet Energy Star ver. 2.0 level V

Over voltage protection latch off
 Operating temperature (open frame type) -20°C to 70°C
 derating: 2.5% / °C > 50°C
 Cooling 300W free air convection
 350W 18CFM forced air
 Storage temperature -20°C to +85°C
 EMI EN55022 "B", EN61000-3-3
 Harmonics..... EN61000-3-2 class D
 EMS..... EN61000-4-2,-3,-4,-5,-6,-8,-11
 Safety UL60950-1 : (cULus)
 EN 60950-1 : 2006 +A11 (TUV)
 ANSI/AAMI ES60601-1 : 2005 (cULus)
 EN 60601-1 : 2006 (TUV)

Mechanical Specifications:

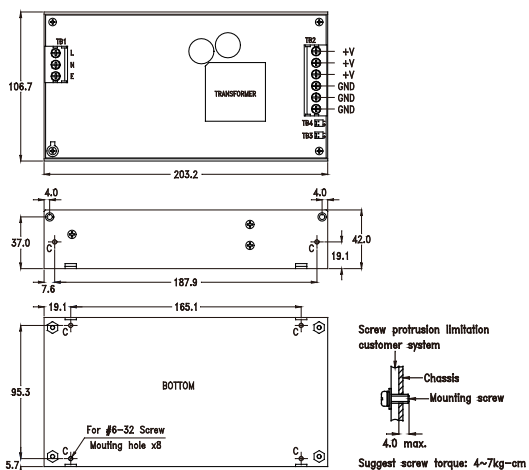

Notes:

1. Dimensions shown in mm as left. Tolerance: +/- 1mm (Excluding cables).
2. Size:
106.7 X 203.2 X 38.1 (mm)
4.2 X 8.0 X 1.5 (inch)
3. Packing:
Net weight: 740 g approx. / unit
Gross weight: 14 kg approx. / carton, 16 units / carton
Carton size (mm): 426 (L) x 313 (W) x 267 (H)
4. Connectors:
AC input: Terminal blocks
DC output: Terminal blocks
Fan, Remote sense, LED :
Molex 5045-02A or equivalent

-Steven-

Output Specifications:


MODEL NO.	OUTPUT RAIL	LOAD			VOLTAGE ACCURACY	RIPPLE NOISE	LINE REG.	LOAD REG.
		MIN.	RATED	MAX.				
SNP-G307	+12V	0A	25A	30A	+11.40V~+12.60V	100mVpp	±1%	±1%
SNP-G308	+15V	0A	20A	24A	+14.25V~+15.75V	100mVpp	±1%	±1%
SNP-G305	+18V	0A	17A	20.5A	+17.10V~+18.90V	150mVpp	±1%	±1%
SNP-G309	+24V	0A	12.5A	15A	+23.80V~+24.20V	200mVpp	±1%	±1%
SNP-G30T	+48V	0A	6.3A	7.6A	+45.60V~+50.40V	200mVpp	±1%	±1%
SNP-G30H	+60V	0A	5A	6A	+54.50V~+65.50V	200mVpp	±1%	±1%

Note:


1. Each output can provide up to max load separately when the power supply starts up. To exceed the max. output power continuously is not allowed
2. At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
3. Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
4. Load regulation is defined by changing ±40% of measured output load from 60% rated load at another output set to 60% rated load.
5. Ripple & noise is measured by using 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor at rated load and nominal line.
6. Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
7. Efficiency is measured at rated load and nominal line.

Performance for SNP-G307:


1. Switching frequency ripple

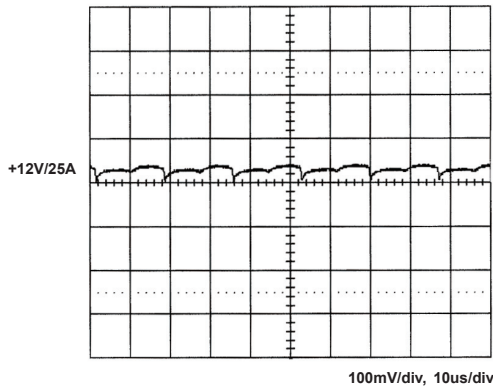


2. Line frequency ripple

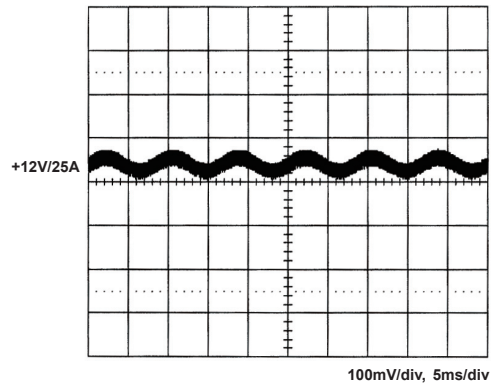


3. Output turn on wave form

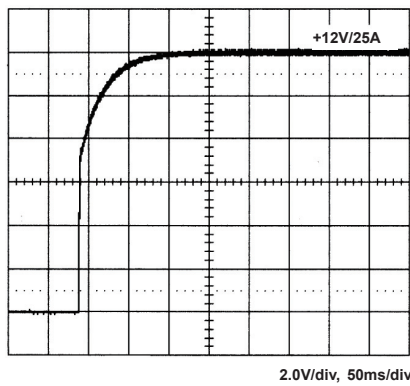


4. Output turn off wave form

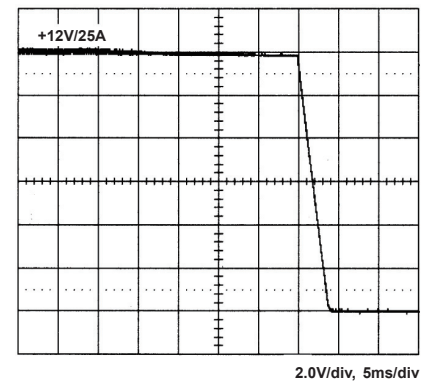


5. Hold-up time

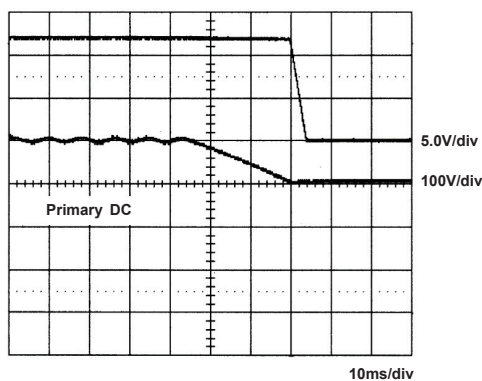


6. Over voltage protection

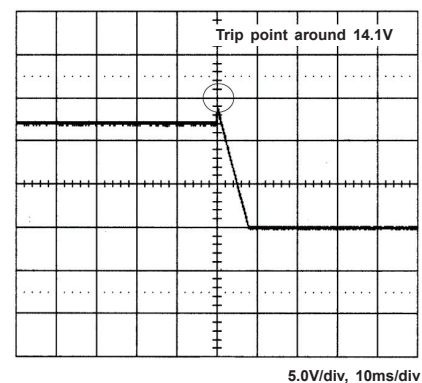


7. +12V step response

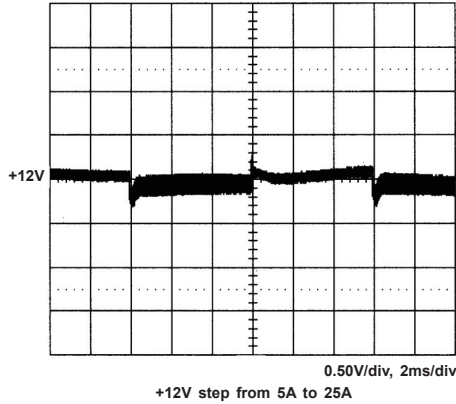


8. +12V peak load

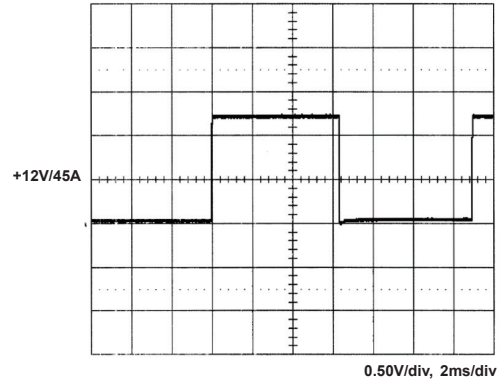

9. FCC B

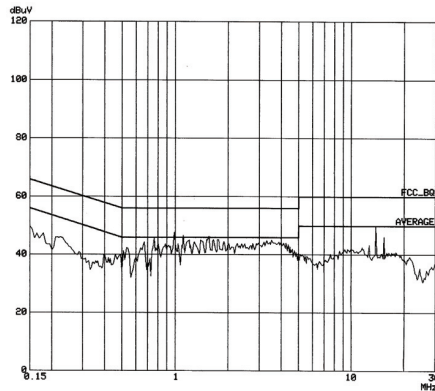

10. CISPR 22 B

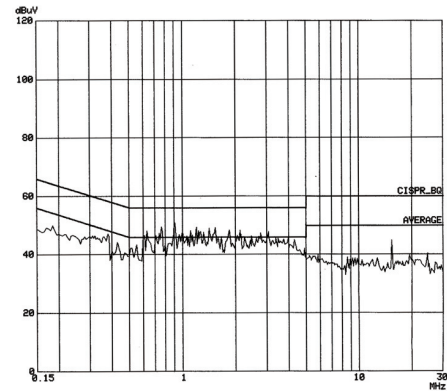

11. Power derating curve

