



①  
(TELEDYNE IS  
.750 MIN.)

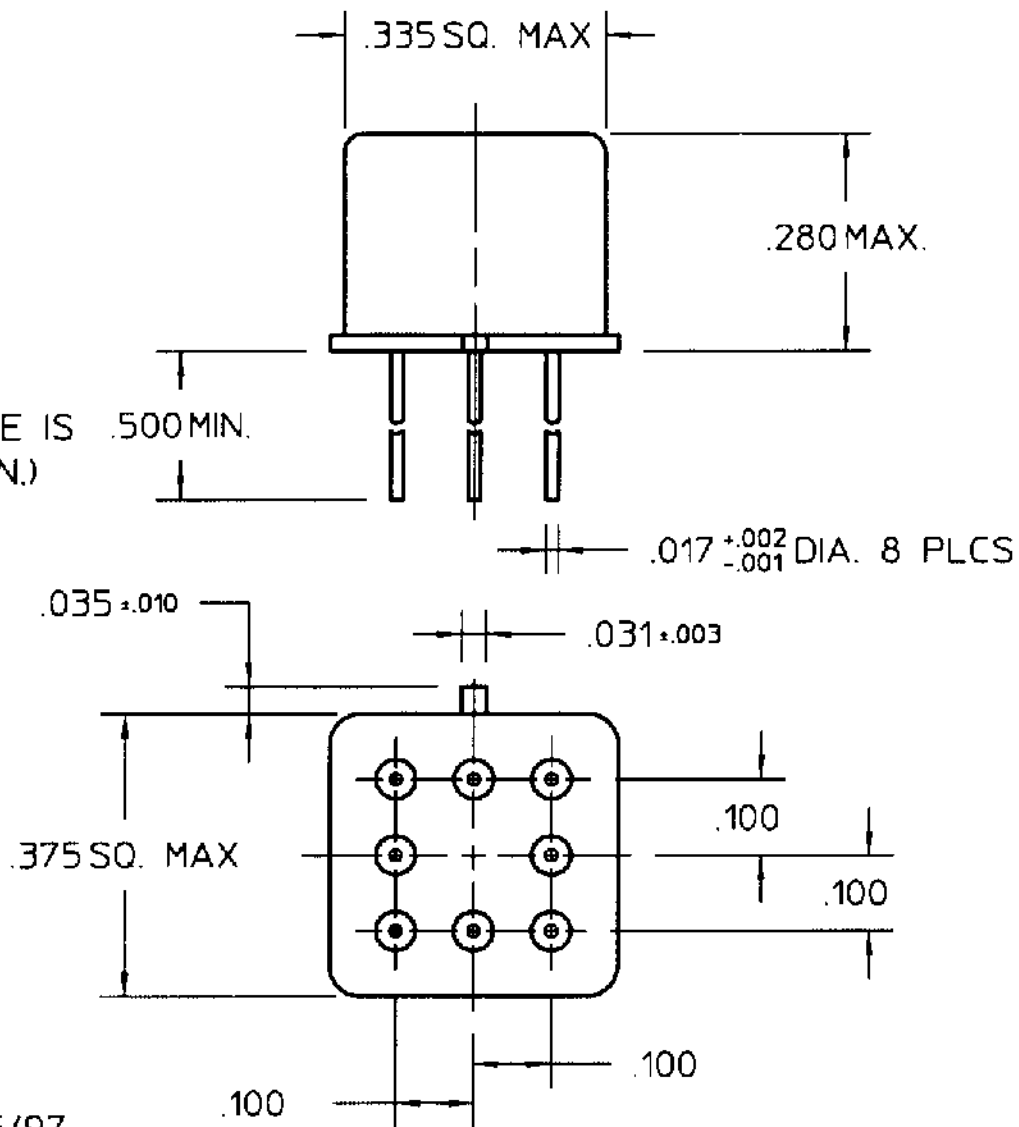

REV. 1 6/5/97

COIL: @ 25°C	
RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	8.0 VDC MAX, 1.37 VDC MIN.

CUSTOMER DATA SHEET



ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO 1 AMP  
28 VDC RESISTIVE 100,000 OPERATIONS MIN.

NOTES:	OPERATE TIME 2.0 MS MAX
	RELEASE TIME 4.0 MS MAX
	CONTACT BOUNCE 1.5 MS MAX

DR. R.B. 4/11/97 CK. 6/5/97



CUST. TELEDYNE  
CUST. NO. ER114D-26A

TYPE PRMGAD RELAY

PRMGACD-26X