

COSEL AC-DC Power Supplies Medical type

GHA300F

Ordering information

GH A 300 F - □ □ - □ □
① ② ③ ④ ⑤ ⑥




Photo is an image of the appearance. May differ from the actual product.

Recommended EMI/EMC Filter EAC-10-472



High voltage pulse noise type : EAP series
Low leakage current type : EAM series
*The EMI/EMC Filter is recommended to connect with several devices.

- ① Series name
 - ② Single output
 - ③ Output wattage
 - ④ Universal input
 - ⑤ Output voltage
 - ⑥ Optional *6
- T3 : mounting hole M3
J1 : VH(J.S.T.)connector type
R3 : with Subfeatures (5VAUX,12VAUX,Remote, Power good)

Specification is changed at option, refer to Instruction manual.

[Cautions]

- Forced air cooling is required for the maximum output power. Please see instruction manual.
 - This power supply requires mounting on metal standoffs 5mm in height. Insulation sheet is required if standoff is not used or less than 5mm clearance is needed.
 - Avoid applying stress to surface mount components.
 - De-rating is required if the applied input voltage is 90-115VAC.
 - The electrolytic capacitor has limited life span which is very much dependent on the actual operating conditions.
 - Operating in the presence of chemical vapors or harsh environment can affect the power supply life expectancy.
 - Please make sure to read the instruction manual carefully before using this product.
- It should be in the "Instruction Manual" not spec sheet.

MODEL	GHA300F-12		GHA300F-24		GHA300F-48	
MAX OUTPUT WATTAGE[W]	300		300		302.4	
DC OUTPUT	Forced air Convection	at 50 C	12V 25A	24V 12.5A	48V 6.3A	
		at 40 C	12V 8.4A	24V 4.2A	48V 2.1A	
		at 50 C	12V 4.5A	24V 2.2A	48V 1.1A	

SPECIFICATIONS

MODEL	GHA300F-12		GHA300F-24		GHA300F-48		
INPUT	VOLTAGE[V]	AC90 - 264 1 φ (output derating is required at AC90V -115V *3)					
	CURRENT[A]	ACIN 120V	3.3typ				
		ACIN 230V	1.8typ				
	FREQUENCY[Hz]	50 / 60 (47 - 63)					
	EFFICIENCY[%]	ACIN 120V	89typ		90typ		
		ACIN 230V	91typ		92typ		
	POWER FACTOR (Io=100%)	ACIN 120V	0.95typ				
		ACIN 230V	0.90typ				
	INRUSH CURRENT[A]	ACIN 120V	20typ (Io=100%) (At cold start) (Ta=25°C)				
		ACIN 230V	40typ (Io=100%) (At cold start) (Ta=25°C)				
LEAKAGE CURRENT[mA]	0.125/0.250max (ACIN 120V/240V 60Hz, Io=100%, According to IEC60601-1)						
OUTPUT	VOLTAGE[V]	12		24		48	
	CURRENT[A]	Forced air	25		12.5		6.3
		Convection	4.5		2.2		1.1
	LINE REGULATION[mV] *4	48max		96max		192max	
	LOAD REGULATION[mV] *4	100max		150max		240max	
	RIPPLE[mVp-p] *1	0 to +50C	240max		240max		300max
		-20 to 0C	320max		320max		400max
	RIPPLE NOISE[mVp-p] *1	0 to +50C	300max		300max		480max
		-20 to 0C	360max		360max		500max
	TEMPERATURE REGULATION[mV]	0 to +50C	120max		240max		480max
		-20 to +50C	150max		290max		600max
	DRIFT[mV] *2	48max		96max		192max	
	START-UP TIME[ms]	500typ (ACIN 120V, Io=100%)					
	HOLD-UP TIME[ms]	16typ (ACIN 120V, Io=100%)					
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	10.80 to 13.20		21.60 to 26.40		43.20 to 52.80	
OUTPUT VOLTAGE SETTING[V]	12.00 to 12.48		24.00 to 24.96		48.00 to 49.92		
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically					
	OVERVOLTAGE PROTECTION[V]	13.80 to 16.80		27.60 to 33.60		55.20 to 67.20	
	AUX1 (12V1A)	Optional					
	AUX2 (5V1A)	Optional					
	REMOTE ON/OFF	Optional					
ISOLATION	PowerGood	Optional					
	INPUT-OUTPUT · RC · AUX *7	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)					
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)					
	OUTPUT · RC · AUX-FG *7	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)					
ENVIRONMENT	OUTPUT-RC · AUX *7	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)					
	OPERATING TEMP., HUMID. AND ALTITUDE	-20 to +70°C, 20 - 90%RH (Non condensing)					
	STORAGE TEMP., HUMID. AND ALTITUDE	-30 to +75°C, 20 - 90%RH (Non condensing)					
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis					
SAFETY AND NOISE REGULATIONS	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis					
	AGENCY APPROVALS	UL60950-1, ANSI/AMII ES60601-1, C-UL, EN60950-1, EN60601-1					
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B					
OTHERS	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (class A) *5					
	CASE SIZE/WEIGHT	76.2 X 35 X 127mm [3.0 X 1.4 X 5.0 inches] (W X H X D) / 400g max					
	COOLING METHOD	Convection, Forced air (Require external fan)					

*1 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.
Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).
*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
*3 Derating is required.
*4 Please contact us about dynamic load and input response.


*5 Please contact us about another class.
*6 Specification is changed at option, refer to Instruction Manual.
*7 Applicable when AUX and remote control (optional) is added.
* To meet the specifications. Do not operate over-loaded condition.
* Sound noise may be generated by power supply in case of pulse load.
* Parallel operation is not possible.

Specifications are subject to change without notice. It is responsibility of each customer to thoroughly test each product and part number under their unique parameters and environments to ensure a product will work properly and reliably.


Features

- High Power density: 14.3W/inch³
- High efficiency 92% typ (Input Voltage 230V, Output Voltage 24V)
- 3" X 5" standard footprint
- Fits 1U applications
- Industrial and Medical safety approvals
- Low leakage current
- With Remote On/Off (Optional)
- With AUX1 (5V), AUX2 (12V) (Optional)
- No minimum load is required

Block diagram

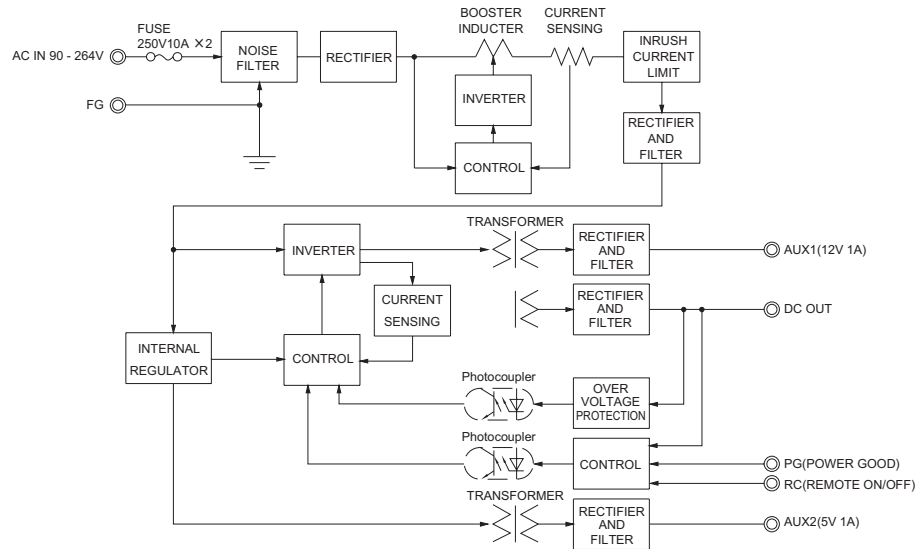

External view

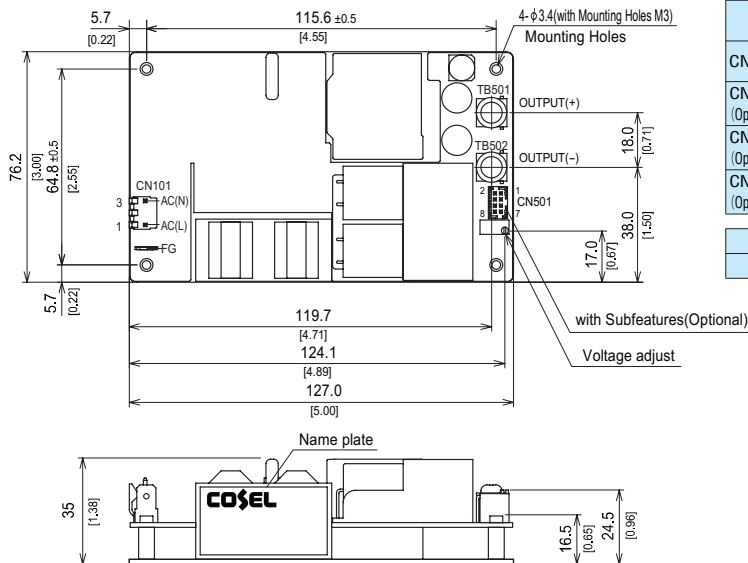

- ※ Tolerance ±1 [±0.04]
- ※ Weight : 400g max
- ※ There is a total of four attachment holes.
- ※ This power supply requires mounting on metal standoffs 5mm in height. (Insulating sheet is required if you do not use a spacer).
- ※ Dimensions in mm, []=inches
- ※ Screw tightening torque : (TB501, 502) : 1.5N · m max
- ※ Mounting torque : 0.6N · m max
- ※ Avoid contact between TB501 and 502 wiring with mounting parts.
- ※ Option : -J1 : (J.S.T) connector type. Refer to Instruction Manual 5.

I/O Connector	Mating connector	Terminal	Mfr
CN101	A-41671-A03A197-2	08-50-0105 08-65-0114	MOLEX
CN501 (Optional)	087831-0820	50394-8051	
CN101 (Optional)	B2P3-VH	VHR-3N	J.S.T.
CN501 (Optional)	B8B-PHDSS	SPHD-002T-P0.5	
FG	Mating connector	Terminal	Mfr
-	250 Series	-	170603-2 Tyco Electronics


<Pin Assignments>

<CN101>

Pin No.	Input
1	AC(L)
2	
3	AC(N)

<CN501 (Optional)>

Pin No.	Function
1	AUX1 : AUX1 (12V1A)
2	AUX1G: AUX1 (GND)
3	RC1 : REMOTE ON/OFF
4	RCG : REMOTE ON/OFF (GND)
5	PG : Power good
6	PGG : Power good (GND)
7	AUX2 : AUX2 (5V1A)
8	AUX2G: AUX2 (GND)



CN501

Specifications are subject to change without notice. It is responsibility of each customer to thoroughly test each product and part number under their unique parameters and environments to ensure a product will work properly and reliably.

Click below for more details, to buy on-line or request volume pricing:
<http://power.sager.com/cosel-GHA300-power-supply.html>

(866) 588-1750
power@sager.com
<http://power.sager.com>