

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0877030001](#)
Status: **Active**
Overview: [Serial ATA Connectors and Cable Assemblies](#)
Description: 1.27mm Pitch Serial ATA Device Plug, 63.50mm Drive, without Jumper, 22 Circuits, Tray Packaging, Lead-Free

Documents:

3D Model	Packaging Specification PK-87703-200 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-87703-017-001 (PDF)	Product Literature (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	87703
Application	Board-to-Board, Signal
Electrical Model	Yes
Overview	Serial ATA Connectors and Cable Assemblies
Product Literature Order No	SNG-029
Product Name	Serial ATA
UPC	756054330487

Physical

Breakaway	No
Circuits (Loaded)	22
Circuits (maximum)	22
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Net Weight	0.944/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	2.00mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	0.50mm
Packaging Type	Tray
Pitch - Mating Interface	1.27mm
Plating min - Mating	0.127µm
Plating min - Termination	0.127µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Partial
Stackable	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Surface Mount

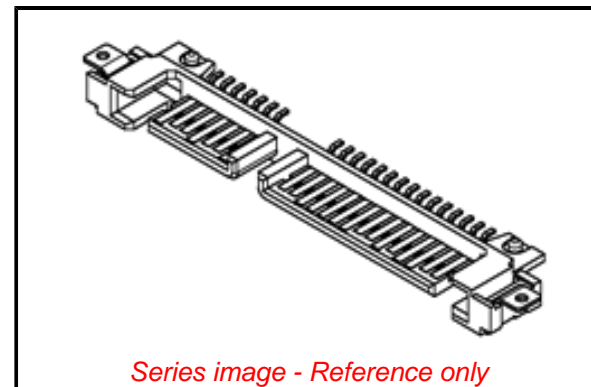

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2017 (12
January 2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[87703](#) Series

Mates With

Combo Receptacle [87678](#) , [87701](#) , [87713](#) , [87779](#) , [87780](#) , [67492](#) , [87781](#) , [67489](#)
Signal Cable Receptacle, [88755](#) Cable Assembly

Electrical

Current - Maximum per Contact 1.5A
Voltage - Maximum 30V

Solder Process Data

Duration at Max. Process Temperature (seconds) 010
Lead-free Process Capability REFLOW
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 260

Material Info**Reference - Drawing Numbers**

Electrical Model Document EE-47018-003, EE-67492-001, EE-87678-001,
EE-87703-001, EE-87703-002, EE-87703-003,
EE-87713-001, EE-87779-001, EE-87779-002,
EE-87824-002, EE-87863-004

Packaging Specification PK-87703-200
Product Specification PS-87703-017-001
S-Parameter Model SP-47018-003, SP-67492-001, SP-78011-001,
SP-87703-001, SP-87713-001, SP-87779-002

Sales Drawing SD-87703-002

This document was generated on 02/14/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION