


The porcelain extreme high temperature wire connector is the solution for high temperature furnace/oven or other intense heat applications up to 645°C (1200°F).

Cap


- Made of porcelain - rated up to 645°C (1200°F)
- Closely spaced grooves for excellent twisting power
- Deep wide throat ensures full insulation coverage
- Funneled entry helps wires into threaded compression compartment
- Springless - Inner surface of cap threaded to secure conductors with the same efficiency as a spring.
- Approved for circuits up to 300V only.
- For stranded copper conductor only.



HARDENED
PORCELAIN THREADS

EXCELLENT GRIP

DEEP WIDE THROAT

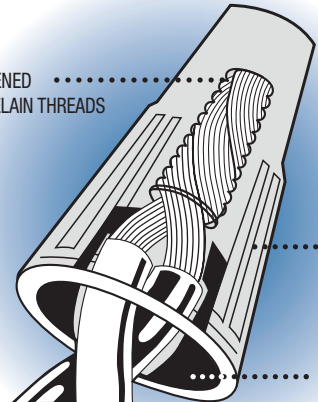

Ordering Information

| Model | Colour | AWG Wire Range | | | | | | | |
|------------------------|--------|----------------|----|-------------|---------------------|----|----|----|---|
| | | 22 | 20 | 18 | 16 | 14 | 12 | 10 | 8 |
| 10-401, 10-411, 10-421 | white | | | Min.: 2 #18 | Max.: 1 #18 + 2 #16 | | | | |
| 10-405, 10-415, 10-425 | white | | | Min.: 2 #18 | Max.: 2 #18 + 2 #16 | | | | |
| 10-407, 10-417, 10-427 | white | | | Min.: 2 #18 | Max.: 4 #16 | | | | |

Note: Refer to page 22 for related Wire Combination Reference Guides.

Packaging Options

| Catalogue Number | Packaging Format | Quantity per Package | Std. Pkg. (Min./Mult.) |
|------------------|------------------|----------------------|------------------------|
| 10-401 | Box | 100 | 100 Units |
| 10-411 | Box | 1,000 | 1,000 Units |
| 10-421 | Box | 5,000 | 5,000 Units |
| 10-405 | Box | 100 | 100 Units |
| 10-415 | Box | 1,000 | 1,000 Units |
| 10-425 | Box | 5,000 | 5,000 Units |
| 10-407 | Box | 100 | 100 Units |
| 10-417 | Box | 1,000 | 1,000 Units |
| 10-427 | Box | 5,000 | 5,000 Units |