

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0010845040](#)
Status: **Active**
Overview: [MLX Power Connectors](#)
Description: 6.35mm Pitch MLX Power Connector Header, Vertical, 4 Circuits, Polyester 94V-0, Tin (Sn) Plating, White

Documents:

3D Model	Packaging Specification PK-43255-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-43255-003-001 (PDF)
Product Specification PSX-42002-0001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179


General

Product Family	PCB Headers
Series	42002
Application	Power, Wire-to-Board
Comments	Solder Type
Overview	MLX Power Connectors
Product Name	MLX
UPC	800754227865

Physical

Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Natural
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Resin	Polyester
Net Weight	2.838/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	4.27mm
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	6.35mm
Pitch - Termination Interface	6.35mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole

Electrical

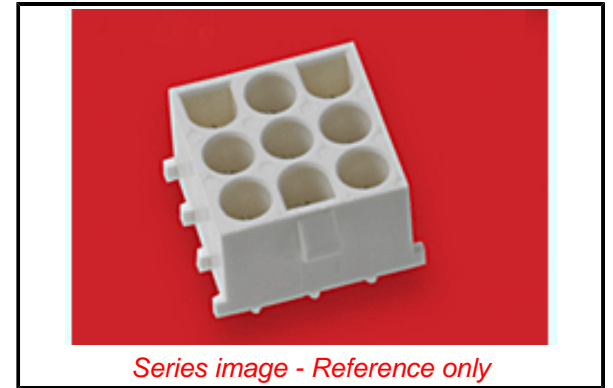

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2018 (15
January 2018)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[42002 Series](#)

Mates With

[42021 Plug](#)

Current - Maximum per Contact 13.5A, 20.0A
Voltage - Maximum 600V

Solder Process Data

Duration at Max. Process Temperature (seconds) 010
Lead-free Process Capability WAVE
Process Temperature max. C 260

Material Info

Engineering Number 42002-4C1A1

Reference - Drawing Numbers

Packaging Specification PK-43255-001-001, PK-43255-003-001
Product Specification PSX-42002-0001-001
Sales Drawing SDA-42002-*****

This document was generated on 07/10/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION