


番号 NO.	部品 PART NAME	材質 MATERIAL	仕上げ FINISH
①	シュラウド SHROUD	液晶ポリマー、ミネラル強化、自然色(白)、UL94V-0 LCP, MINERAL-REFINFORCED, NATURAL(WHITE), UL94V-0	—#—

CONFIDENTIAL

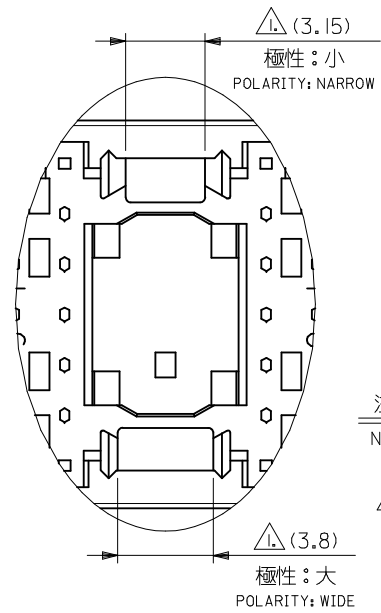


注記
NOTE

△ コネクタ嵌合極性部の実装向きは注意のこと。
BE CAREFUL THE DIRECTION OF THE POLARITY PARTS.
2. ELV and RoHS Compliant

DETAIL A (SCALE: 5-1)
(コネクタ嵌合極性部拡大図)

15.35	1.9	2.6 ~ 5.6	55719-9106	110
15.15	1.7	2.8 ~ 5.6	55719-9105	110
14.95	1.5	3.0 ~ 5.6	55719-9104	110
14.75	1.3	3.2 ~ 5.6	55719-9103	110
14.55	1.1	3.4 ~ 5.6	55719-9102	110
14.35	0.9	3.6 ~ 5.6	55719-9101	110
13.45	0	4.5 ~ 5.6	55719-9100	110
H	T	適合基板厚 (mm) APPLICABLE PCB THICKNESS	MATERIAL NO.	極数 PIN

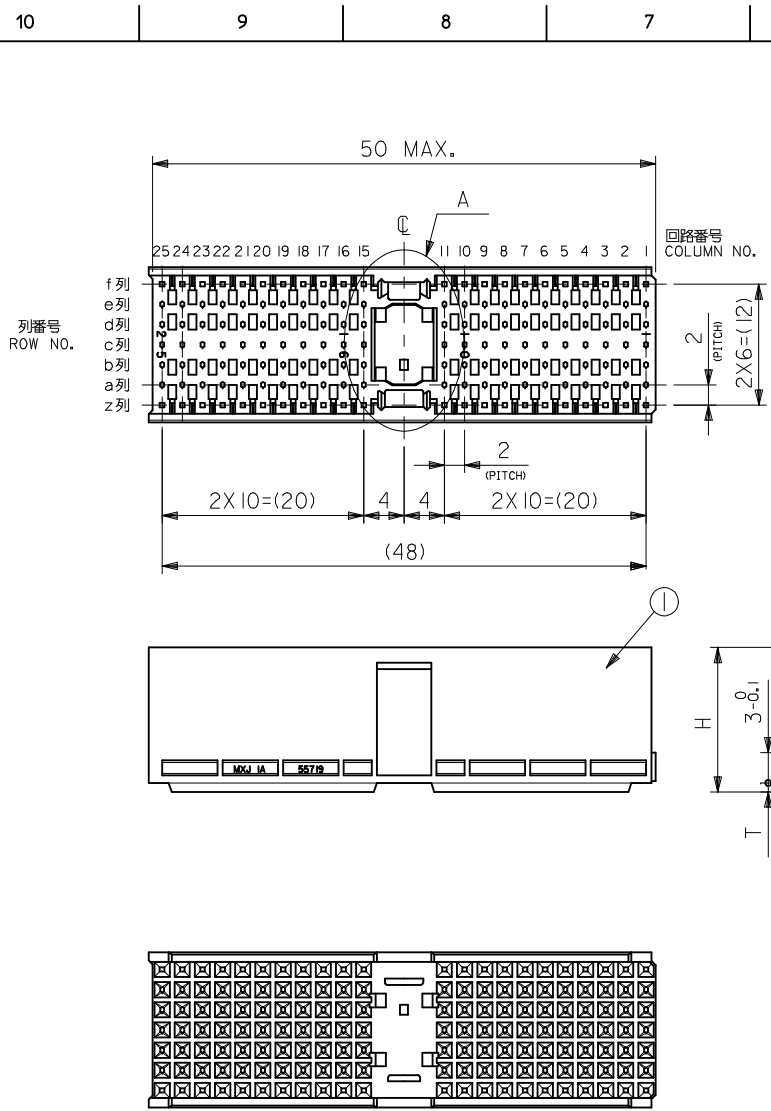

REVISED EC NO.: J2012-1509 DRWN: AIDA CHKD: AMI, ZUMURA APPR: MYAGI	DESCRIPTION 2012/06/15 2012/06/15 2012/07/03	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	±0.20	DRAWN BY SANDO	DATE 2001/04/19	TITLE MZP B/B CONN. SHROUD TYPE A REVERSE POLARITY			
10 OVER 30 UNDER	±0.25	CHECKED BY ANODA	DATE 2001/04/19						
30 OVER	±0.30	APPROVED BY	DATE						
ANGULAR ±3 °		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-55719-005		SHEET NO. 1 OF 1			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							