


REV. 0
DCO 17663

COIL: @ 25°C	
RESISTANCE	675 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 Hz TO 2000 Hz @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +85 °C
NOTES:	OPERATE 4 MS MAX. RELEASE 2 MS MAX.

CUSTOMER DATA SHEET

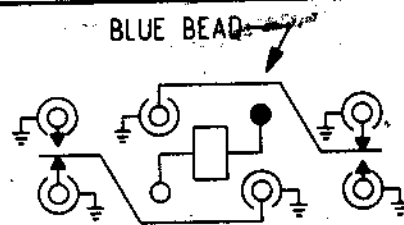

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC 200 WATTS RF (CARRY)
	75 WATTS RF
	100,000 OPERATIONS (SWITCHED)

DR. B.D. 12FEB03

CK 2/12/03

CII Technologies
advanced control electronic solutions

CUST. CII STD.
CUST. NO. REV.

"2RFK" RELAY

2RFK-1C-126