

COIL: @ +25°C

RESISTANCE 2074 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.4 VDC

MUST RELEASE 1.4 v VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS AT 20 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

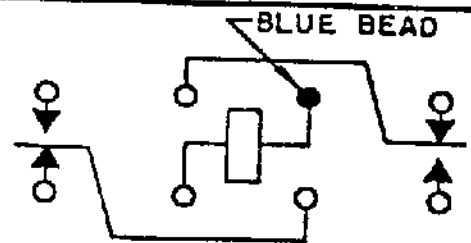

CONTACT RATING: Low Level
2 AMPS 28 VDC 100,000
Operations

DR. 5-30-85

CK. OSW



Communications
Instruments, Inc.

CUST. Hi-G

CUST. NO. 2KA-2A-126

TYPE HMS RELAY

HMS 1201S03