


COIL: @ +25°C  
 RESISTANCE 814 OHMS ± 10%  
 NOMINAL VOLTAGE 24.0 VDC  
 MUST OPERATE 12.1 VDC  
 MUST RELEASE \_\_\_\_\_

ENVIRONMENT:  
 VIBRATION 10 CPS TO 3000 CPS @ 20 g's  
 SHOCK 150 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 3.5 MS MAX  
 RELEASE TIME 3 MS MAX  
 CONTACT BOUNCE 1 MS MAX

CUSTOMER DATA SHEET

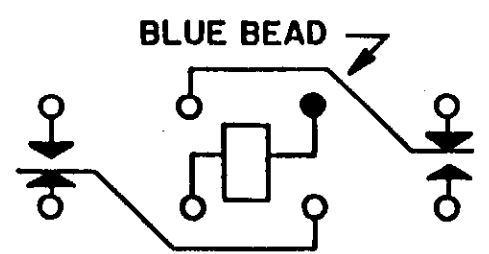

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC 100,000 OPERATIONS

DR. 8/1/91 JAB CK. 8/1/91 JMB



CUST. P+B  
 CUST. NO. HC-110-24 TYPE HFW RELAY

**HFW1201S142**