



3680 ACTIVE HEAT SINK

The 3680 series Active heat sink provides a low profile solution for cooling BGA or other square IC packages. The heat sink includes a clip to easily attach to Socket 7 ZIF mounting sockets. The 3680 series features a reliable ball bearing fan with a minimum life of 50,000 hrs at 25°C. The heat sink includes a pre-applied interface material and is offered with either a 5V or 12V fan.



FEATURES:

- High reliability >50K hrs at 25°C
- Low profile
- Available with Clip or tape for quick installation to the IC
- Common 2 pin connector
- Clip versions available with pre-applied SOFTFACE® interface material
- Choice of 5V or 12V fans

APPLICATIONS:

- Microprocessors
- FPGA's
- Graphic processors
- DSP's
- Embedded processors

ORDERING INFORMATION:

Part Number	Description
368055B00067	Active heat sink with 12V fan, no interface material and socket 7 Clip
368055B20067	Active heat sink with 12V fan, SOFTFACE® material and socket 7 Clip
368055B00032	Active heat sink with 12V fan, no interface material and double sided tape
368052B00067	Active heat sink with 5V fan, no interface material and socket 7 Clip
368052B20067	Active heat sink with 5V fan, SOFTFACE® material and socket 7 Clip
368052B00032	Active heat sink with 5V fan, no interface material and double sided tape




**AAVID
THERMALLOY**

3680 Active Heat Sink

For Embedded PC Cooling

PART NUMBER 368055B20067:

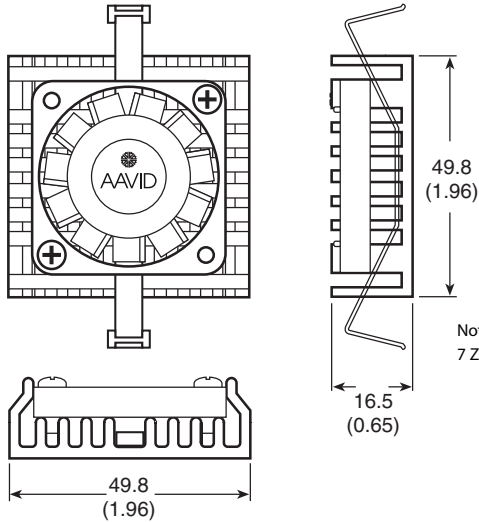

Note: Clip attach version compatible with socket
7 Zif sockets AMP #916716 or equivalent

FAN CONNECTOR PIN OUT

Position	Wire Color	Polarity
Pin1	Red	+
Pin2	Black or Green	-

ACTIVE (FAN) HEAT SINK SPECIFICATION:

Properties	Value	Units
Height	16.5 (0.65)	mm (inches)
Weight	43.9 (1.55)	grams (ounces)
Voltage Range	12V	10.2 – 13.8
	5V	4.5 – 5.5
Current Max	12V	110
	5V	90
Lead Length	203 (8.0)	mm (inches)
Connector	#2965 – 2 pin	Molex or equiv.
Noise - (Fan Only)	27	dB @ 1 m
UL Recognized Fan Only	E131310	
CSA Certified (Fan Only)	LR92346	

THERMAL RESISTANCE (SINK TO AMBIENT):

Active Fan Heat sink	1.38 °C/W
Softface	0.20 °C/W

North America

80 Commercial Street
Concord, NH 03301
TEL: (603) 224-9988
FAX: (603) 223-1790
EMAIL: info@aavid.com

Europe - Italy

Via Aprile,32
40057 Cadriano (BO), Italy
TEL: (39) 051 764011
FAX: (39) 051 764090
EMAIL: sales.it@aavid.com

Europe - England

Cheney Manor
Swindon
SN2 2QN
England
TEL: 44(0) 1793 401400
FAX: 44(0)1793 615396
EMAIL: sales.uk@aavid.com

Asia - Taiwan

14F-4, NO. 79, Hsin Tai Wu RD.
SEC. 1, Hsi Chih
Taipei Hsien
Taiwan
TEL: 011(886) 2-2698-9888
FAX: 011(886) 2-2698-9808

Asia - Singapore

5 Woodlands Industrial Park E1
Singapore 757728
TEL: 65-6362-8388
FAX: 65-6362-8588

PLEASE NOTE: Our customers are reminded that they bear the responsibility for testing Aavid Thermalloy's products for proposed use. Any information furnished by Aavid Thermalloy is believed to be accurate and reliable, but our customers must bear all responsibility for use and applications of Aavid Thermalloy products. AAVID THERMALLOY MAKES NO WARRANTIES EXPRESSED OR IMPLIED, AS TO THE FITNESS, MERCHANTABILITY, OR SUITABILITY OF ANY AAVID PRODUCTS FOR ANY SPECIFIC OR GENERAL USES. AAVID THERMALLOY SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND. All Aavid Thermalloy products are sold pursuant to the Aavid Thermalloy Domestic Terms and Conditions of Sale in effect from time to time, a copy of which shall be furnished upon request (8911A). Copyright © Aavid Thermalloy, LLC. October 2004. All icons, drawings, illustrations, and trademarks are the property of Aavid Thermalloy, LLC. and may not be reproduced without express written permission. (10/2004)

FOR MORE INFORMATION, VISIT OUR WEB SITE: WWW.AAVIDTHERMALLOY.COM

TEL: (603) 224-9988