


COIL: @ 25°C
 RESISTANCE 22 OHMS ± 10%
 NOMINAL VOLTAGE 6.0 VDC
 MUST OPERATE 3.3 VDC
 MUST RELEASE .5 VDC MIN.

CUSTOMER DATA SHEET

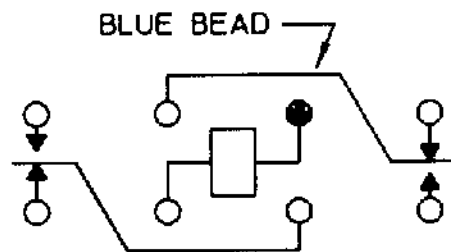

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: 10A 30 VDC RES.
10A 115 VAC 400 Hz, 6A 30 VDC
INDUCTIVE 100,000 OPERATIONS

NOTES: OPERATE TIME 13 MS MAX.
 RELEASE TIME 5 MS MAX.
 CONTACT BOUNCE 5 MS MAX. (NO)
2 MS MAX. (NC)

DR. R.B. 12/7/94 CK. 12/7/94



CUST. Hi-G
 CUST. NO. 2T-1C-106

TYPE 07 RELAY

B07B932BZ1-8006