

COIL: @ 25°C  
 RESISTANCE 1030 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 11.4 VDC  
 MUST RELEASE 6.9 VDC MAX, 1.1 VDC MIN.


ENVIRONMENT:  
 VIBRATION 10 CPS TO 2500 CPS @ 20 g's  
 SHOCK 50 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX.  
RELEASE TIME 5 MS MAX.  
CONTACT BOUNCE 2 MS MAX.

CUST. QPL  
 CUST. NO. M39016/44-031L

TYPE 'HMS' RELAY

CUSTOMER DATA SHEET

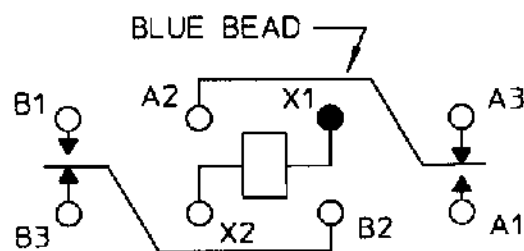

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/18/98 CK 2/18/98


**COMMUNICATIONS  
INSTRUMENTS, INC.**

HMS1131S04L