

REV. 0
DCO 170339


COIL: @ 25°C	
RESISTANCE	5000 OHMS ± 10%
NOMINAL VOLTAGE	6.0 mADC
MUST OPERATE	2.8 mADC
MUST RELEASE	1.4 mADC MAX, 0.3 mADC MIN

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	15	g's
SHOCK	100	g's	6	MS DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE TIME 15 MS MAX.
RELEASE TIME 10 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

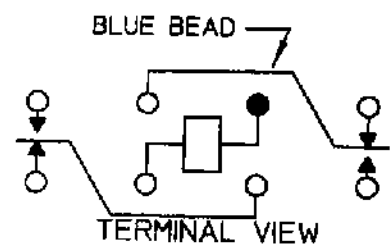

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. PBB 12/6/00 CK. TLG 12-6-00



CUST. QPL
CUST. NO. M5757/13-090 REV. 3SAT RELAY

BSAT1307A2