


REV, 2 8/25/98

COIL: @ 25°C	
RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
GATE TURN-ON	4.3 VDC MAX.
GATE TURN-OFF	0.5 VDC MAX.
MUST RELEASE	8.0 VDC MAX, 1.30 VDC MIN.

CUSTOMER DATA SHEET

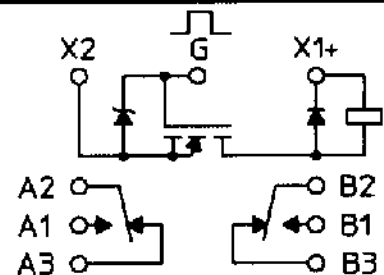

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO 1A  
28 VDC RESISTIVE 100,000 OPERATIONS

NOTES:	OPERATE TIME 2.5 MS MAX.
	RELEASE TIME 4.0 MS MAX.
	CONTACT STABILIZATION 2.0 MS MAX.

DR. R.B. 3/5/97 *(Signature)* 8/25/98

**COMMUNICATIONS INSTRUMENTS, INC.**

CUST. GPL  
CUST. NO. M28776/6-006M

TYPE JMGAT RELAY

**JMGAT-26M**