

REV. 1


DCO 16187

COIL: @ 25°C	
RESISTANCE	700 OHMS ±10%
NOMINAL VOLTAGE	20.0 - 30.0 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.0 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

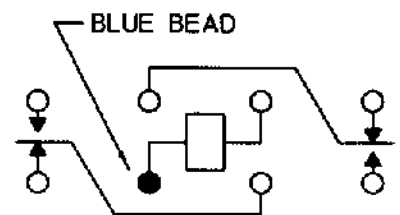

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE 100,000
OPERATIONS

DR. B.D. 9/20/99 CK 3/27/00

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. GENICOM
CUST. NO. 3SAV5042H1 REV.

"HFW" RELAY

HF W1103K09